
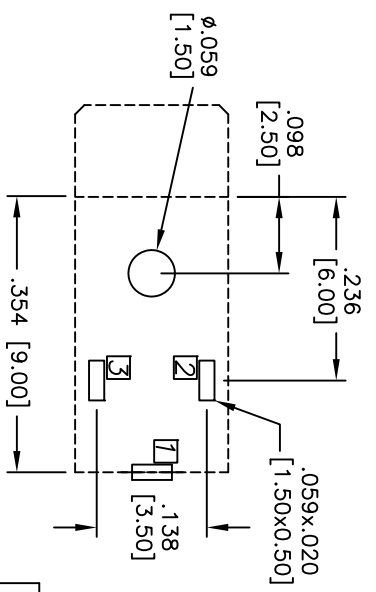
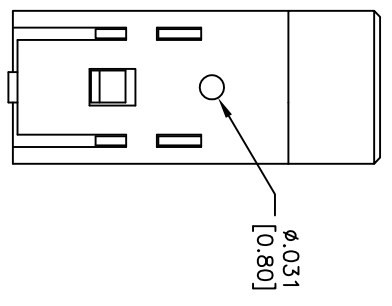
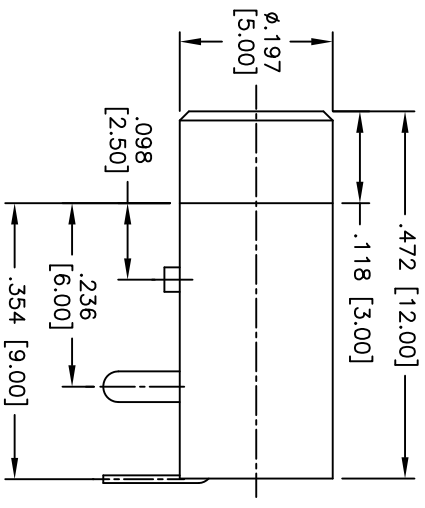


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/12/09	
A		REVISED DIM.	3/18/11	

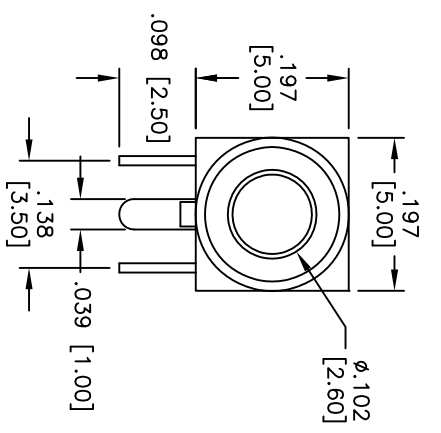

PART NO.	ASJ-63A-3
SCHMATIC	

RECOMMENDED PCB LAYOUT  
(COPPER-SIDED VIEW)

**SPECIFICATIONS:**

**Material:**

Insulator: PBT, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Phosphor Bronze

**Plating:**

Tin over Copper underplate

**Electrical:**

Operating voltage: 30 VDC max.  
 Current rating: 0.5 Amp max.  
 Contact resistance: 30 mohms max. initial  
 Insulation resistance: 100 Mohms min.

**Dielectric withstanding voltage:** 500 VAC for 1 minute

**Temperature Rating:**

Operating temperature: -65°C to +125°C  
 Environmental:  
 Lead free, RoHS compliant.  
 Recommended soldering temp: 235°C for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

**2.5 PHONE JACK**

TITLE	2.5 PHONE JACK		
SIZE	PART NO.	SCALE	REV.
X	ASJ-63A-3	NIS	A
REF:	S0002C	SHEET	1 OF 1