
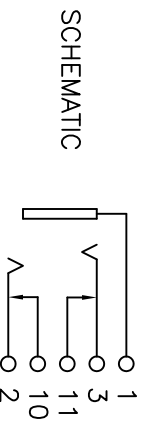


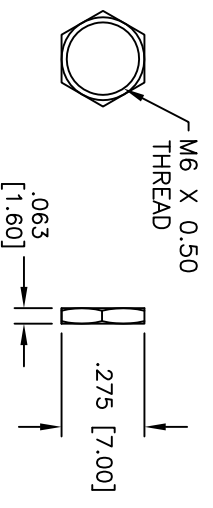


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/25/06	
A		ADDED TORQUE TO M6 THREADS	10/25/06	

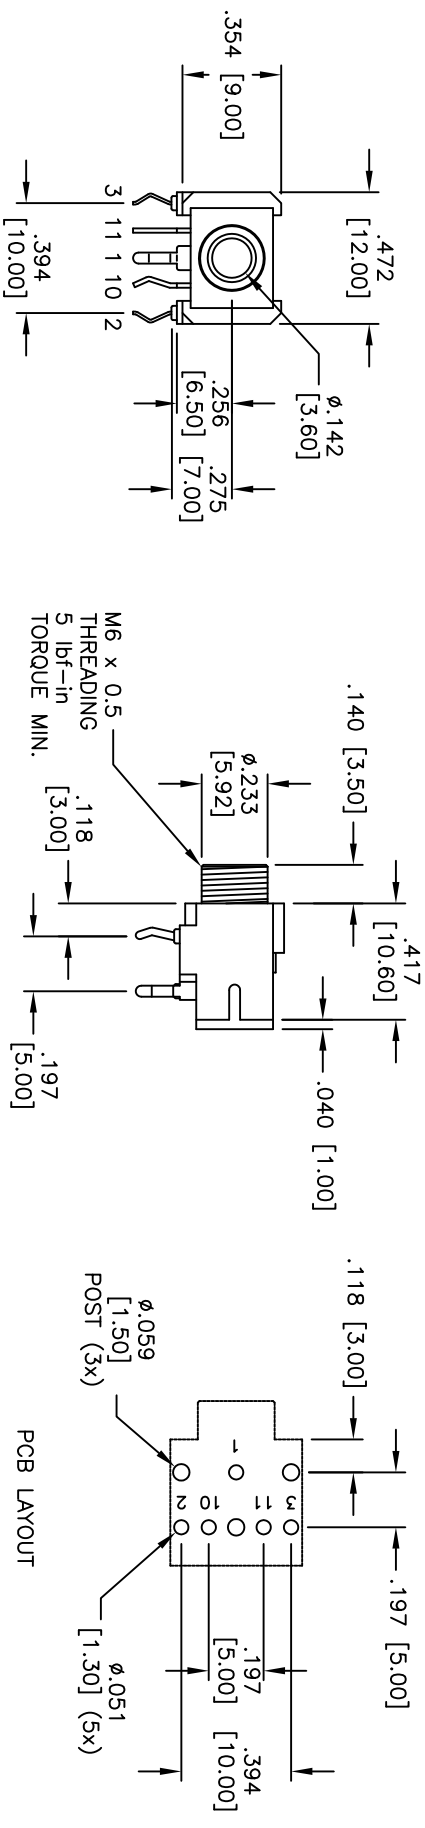

HEX NUT SUPPLIED SEPERATE IN BAG

RECOMMENDED Ø3.5 MATING PLUG

M6 BUSHING THREADS

SPECIFICATIONS:

Material:

Insulator: PBT, Glass reinforced, rated UL 94V-0

Insulator color: Black

Bushing: Brass, Nickel plated

Contacts: Copper Alloy

Plating: Tin over Copper underplate

Electrical:

Operating voltage: 12 VDC max.

Current rating: 1 Amp max.

Contact resistance: 30 mohms max. initial

Insulation resistance: 100 Mohms min.

Dielectric withstanding voltage: 500 VAC for 1 minute

Mechanical

Life Cycles: 25,000 Cycles min.

Temperature Rating:

Operating temperature: -65°C to +125°C

Environmental:

Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
.X	± .10
.XX	± .020
.XXX	± .015
.XXX	± .015
ØXX	± .10
ØXXX	± .015
ØXXX	± .010

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

APPROVALS	DATE
DRAWN	BW
CHECKED	
APPROVED	

TITLE	SIZE	PART NO.	SCALE	SHEET	REV.
STEREO JACK	X	ASJ-7-5-M	MKS	1 OF 1	A

