Rev	AWO #	Description	Date	Appr
-		RELEASED	5/16/11	

APPROVED: _____

DATE: _____ TITLE: _____

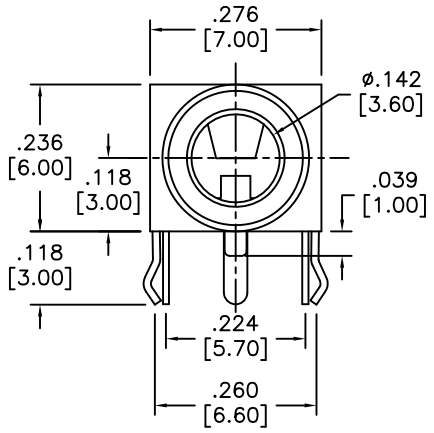

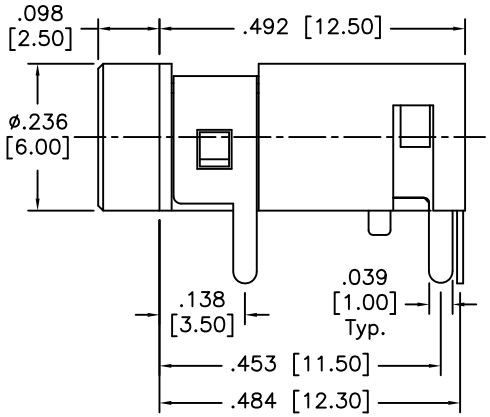

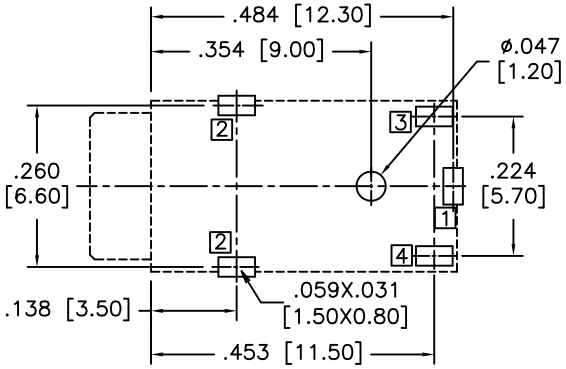

RECOMMENDED PCB LAYOUT
(BOTTOM VIEW)

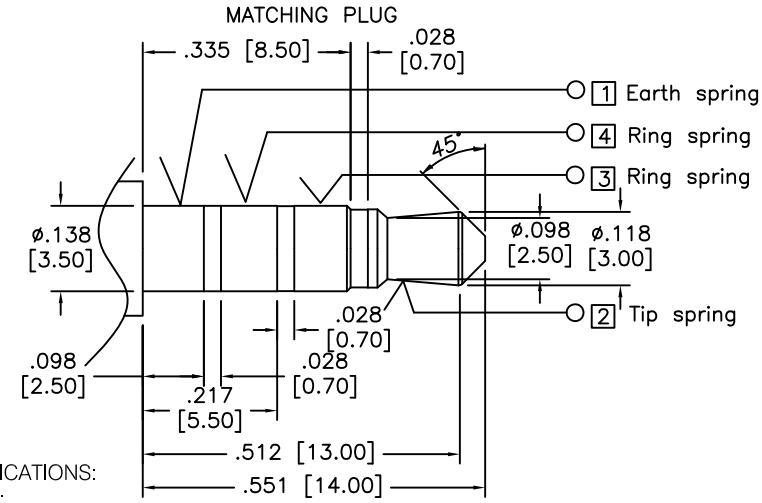

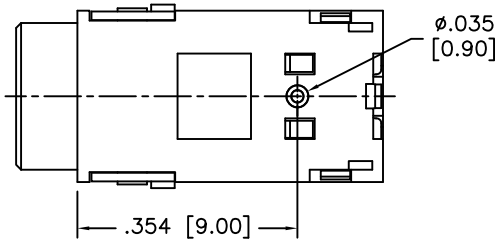



SPECIFICATIONS:
Material:
Insulator: PBT, glass reinforced, rated UL 94V–0
Insulator color: Black
Contacts: Copper Alloy, Silver plated.
Electrical:
Rated Voltage and Current: DC30V, 0.5A.
Contact resistance: 30 mohms max.
Insulation resistance: 100 Mohms min. @ 500V DC
Withstanding votage: 500 VAC
Temperature Rating:
Operation temperautre range: –20°C to +70°C
Environmental:
Lead free, RoHS compliant.
Recommended soldering temp: 235°C for 5 sec.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	5/16/11
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
STEREO PHONE JACK, 3.5mm

SIZE	PART NO.	REV.
X	ASJ-76-3S-M	-

REF:	SCALE:	SHEET
S00002C	NTS	1 OF 1