
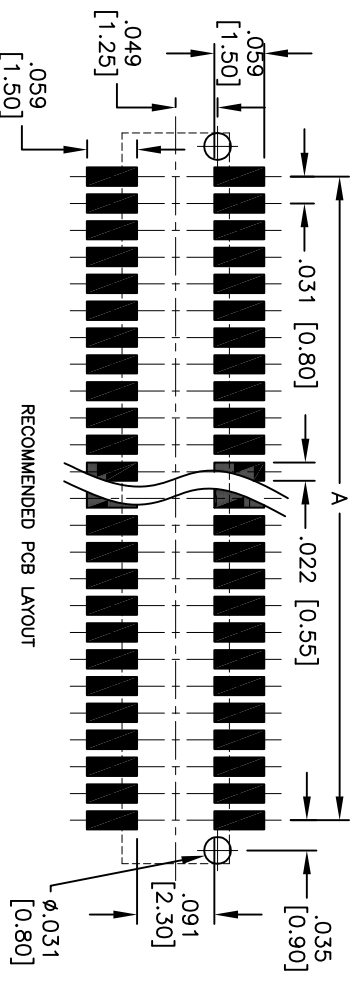
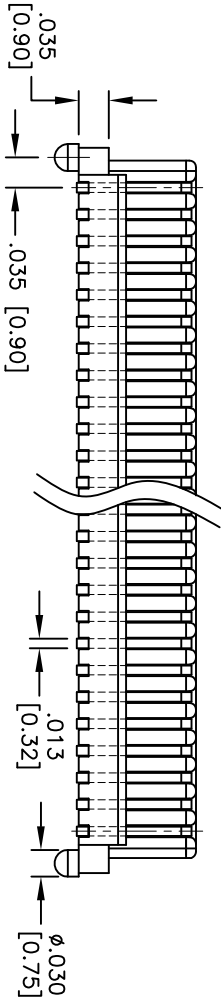


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/29/10	

APPROVED: _____
 DATE: _____ TITLE: _____

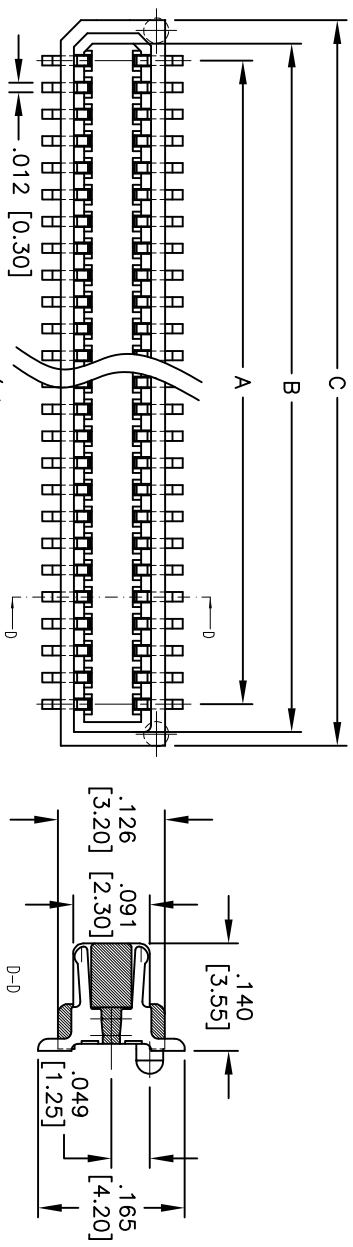

PACKAGED ON TAPE & REEL

Position: 10 thru 100
 A = .020 [0.50] x (No. of Contacts/2 - 1) + .063 [1.60]
 B = .020 [0.50] x (No. of Contacts/2 - 1) + .098 [2.50]
 C = .020 [0.50] x (No. of Contacts/2 - 1) + .098 [2.50]

SPECIFICATIONS:
 Material: Insulator: Hi-Temp thermoplastic, rated UL 94V-0
 Insulator color: Natural
 Contacts: Copper Alloy
 Plating: Gold flash over Nickel underplate overall
 Electrical: Operating voltage: 50 VAC max.
 Current rating: 0.5 Amps max.
 Contact resistance: 40 mohms max. initial
 Insulation resistance: 100 Mohms min
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating: Operating temperature: -20°C to +105°C
 Environmental: Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 seconds



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .031 [0.80] PITCH BOARD TO BOARD
 PLUG CONNECTOR, SMT TYPE

UNLESS OTHERWISE SPECIFIED	INCHES	MILLIMETERS
.X	± .10	± .10
.XX	± .020	± .015
.XXX	± .015	± .010
ØXX	± .10	± .10
ØXXX	± .015	± .010
ØXXX	± .010	± .010

APPROVALS	DATE
DRAWN AY	11/29/10
CHECKED JL	11/29/10
APPROVED	

SIZE	PART NO.	REV.
X	BB8-PL-XXX-G-3.55-T/R	-

REF: S0070T SCALE: NTS SHEET 1 OF 1