


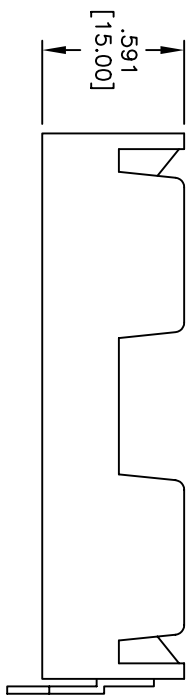


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/17/05	

APPROVED: _____
 DATE: _____ TITLE: _____

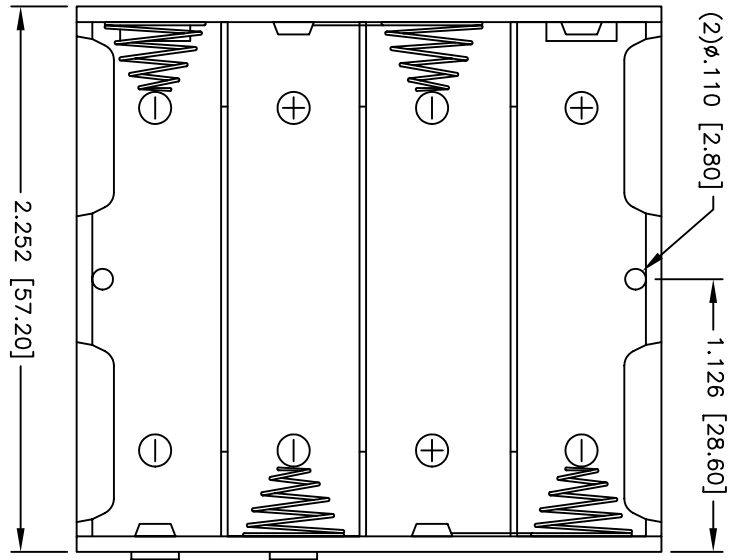

PCB LAYOUT

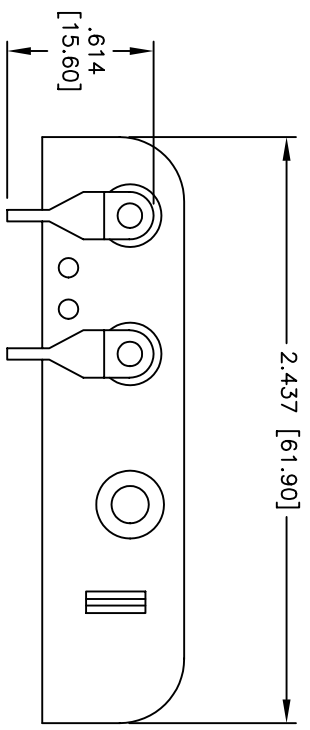

SPECIFICATIONS:

Material: Insulator: Impact resistant Polypropylene, rated UL94-HB
 Insulator color: Black
 Spring: Steel, Nickel plated
 Contacts: Steel, Nickel plated
 Electrical:
 Operating voltage: 1.5 VDC max.
 Temperature Rating:
 Operating temperature: -10°C to +80°C
 Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 230°C for 5 seconds



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES
 .X ± .10 ØXX ± .10
 .XX ± .020 ØXXX ± .015
 .XXX ± .015 ØXXXX ± .010
 APPROVALS: DATE

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

**BATTERY HOLDER, PCB TERMINALS
 FOR FOUR "AA" CELLS**

DRAWN	SS	1/17/05
CHECKED		
APPROVED		

SIZE	PART NO.	REV.
X	BH-06-1	-
REF:	SCALE: NTS	SHEET 1 OF 1