
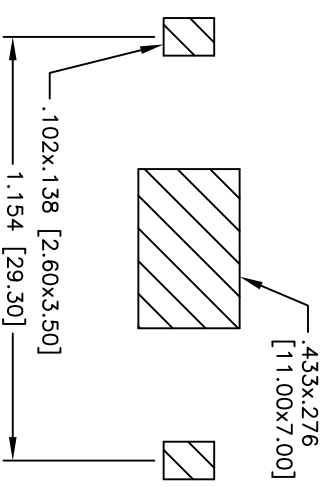
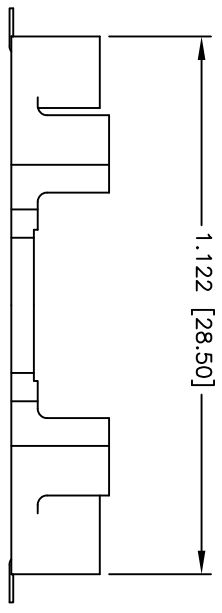
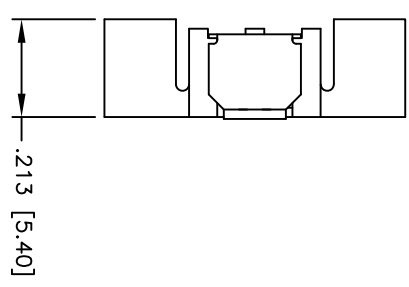


APPROVED: _____ TITLE: _____

DATE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/01/10	

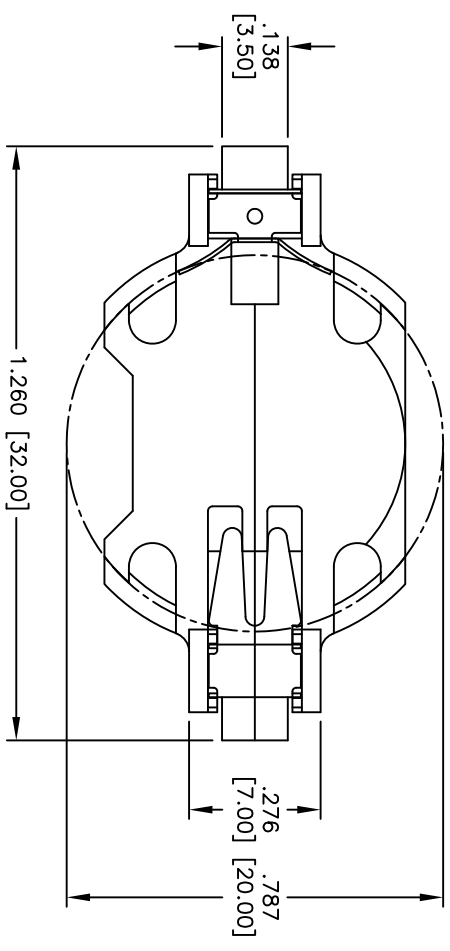

PCB LAYOUT

SPECIFICATIONS:

- Material: Insulator: Hi-temp thermoplastic, rated UL94V-0
- Insulator color: Black
- Spring: Steel, Gold plated
- Contacts: Steel, Gold plated
- Electrical: Operating voltage: 3 VDC max., 120mA
- Contact Resistance: 100 mOhm max
- Temperature Rating: Operating temperature: -55°C to +205°C
- Environmental: Lead free, RoHS compliant
- Recommended soldering temp: 260°C for 5 seconds



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
X ± .10	ØX ± .10
XX ± .020	ØXXX ± .015
XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN DY	7/01/10
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: BATTERY HOLDER, SURFACE MOUNT
 FOR ONE "CON" CELL, GOLD PLATED

SIZE	PART NO.	REV.
X	BH-27-5-G-TR	-
REF:	SCALE: NTS	SHEET 1 OF 2