Rev	AWO #	Description	Date	Appr
-		RELEASED	5/19/10	

APPROVED: _____

DATE: _____ TITLE: _____

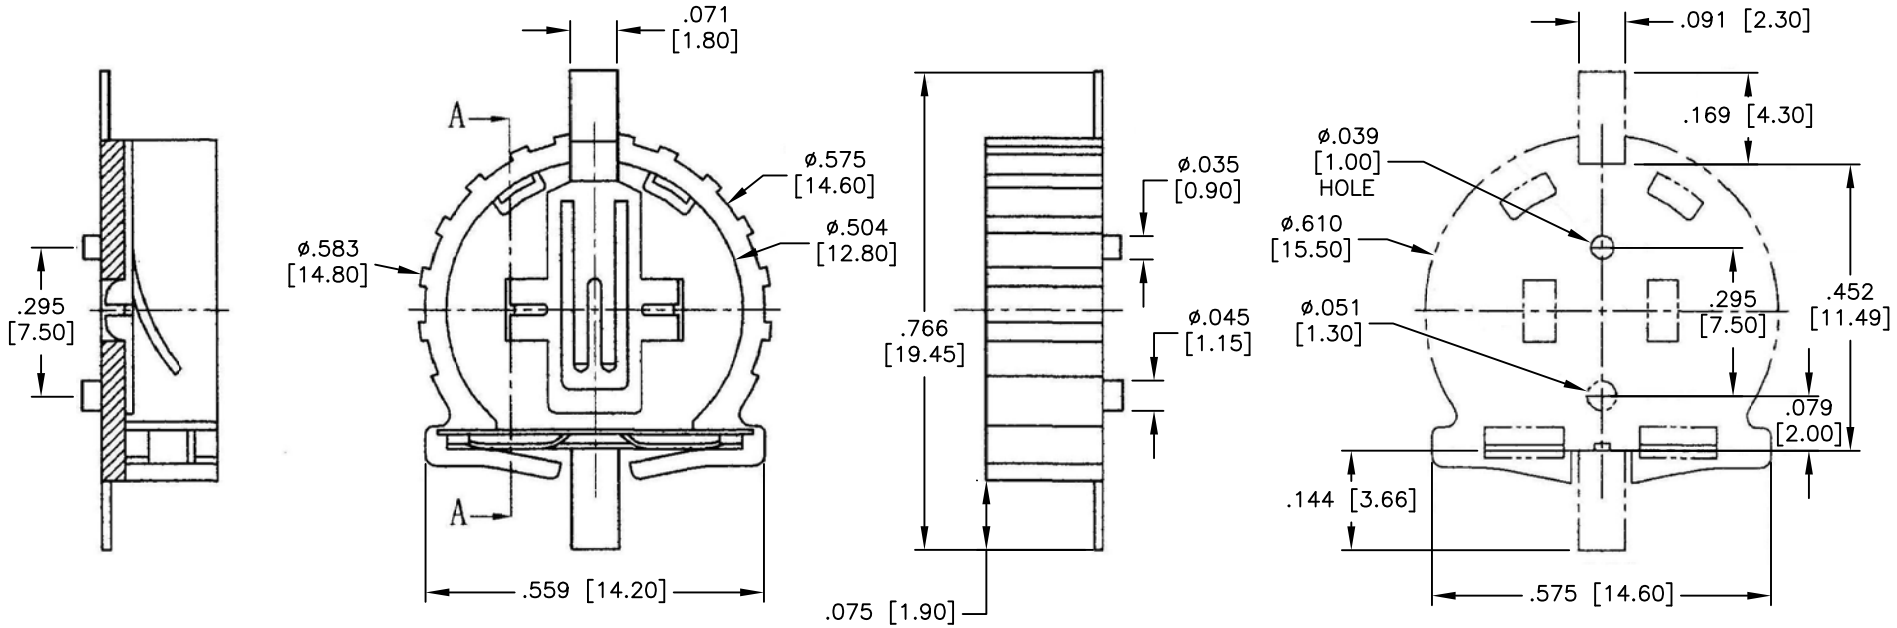

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:
Material:
Housing: PPS, rated UL94V–0
Contact: Phosphor Bronze 0.2 THK, Gold plated over Nickel
Electrical:
Contact resistance: 30 Milliohms max
Insulation resistance: 1000 Mega ohms min
Dielectric Voltage: 500 one sec level
Operating temperature: –55°C to –105°C .
Environmental:
Lead free, RoHS compliant RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	5/19/10
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: BATTERY COIN CELL HOLDER

SIZE	PART NO.	REV.
X	BH-44-5	-

REF: S00021T | SCALE: NTS | SHEET 1 OF 1