

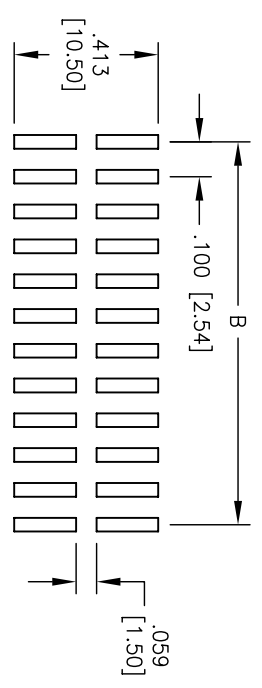
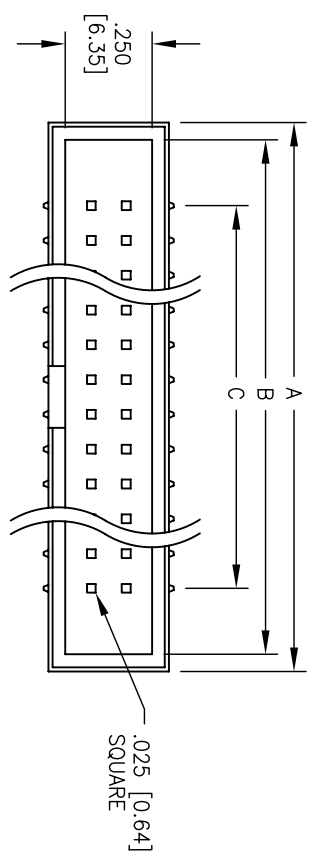


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/17/07	

APPROVED: _____
 DATE: _____ TITLE: _____

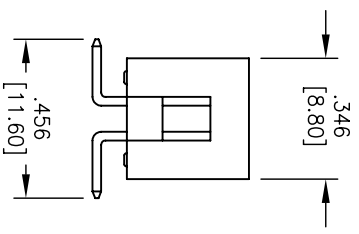

RECOMMENDED
PCB LAYOUT

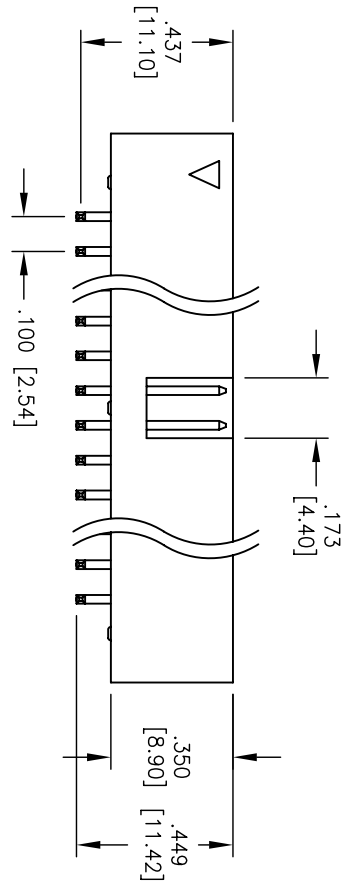

SPECIFICATION:

- Material:** Insulator: Hi-Temp Nylon 6T, rated UL-94V-0
- Insulator Color: Black
- Contacts: Brass
- Contact Plating:** Gold Flash over Nickel underplate overall
- Electrical:** Operating Voltage: 250V AC max.
- Current rating: 1 Amps max.
- Contact resistance: 20 mohms max
- Insulation resistance: 5000 Mohms min
- Dielectric withstanding voltage: 1000 VAC / minute
- Mechanical:** Mating durability: 500 cycles min.
- Temperature Rating:** Operating Temperature: -55° TO +105°
- Environmental: Lead free, RoHS compliant.
- Recommended soldering temp: 260°C for 5 sec.

- A = .100 [2.54] X No. of Positions / 2 + .300 [7.60]
- B = .100 [2.54] X No. of Positions / 2 + .200 [5.08]
- C = .100 [2.54] X No. of Spaces

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

BOX HEADER, RIGHT ANGLE, SMT MOUNT,
 2 ROW .100 PITCH, GOLD FLASH

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		TITLE	
INCHES	± .10	ØXX	± .10
HOLES	± .10	ØXXX	± .015
XXX	± .020	ØXXXX	± .010
XXX	± .015	DATE	
APPROVALS			
DRAWN	SS	7/17/07	
CHECKED			
APPROVED			
SIZE	PART NO.	REF:	REV.
X	BHR-XX-HUA-SMT	SCALE: MTS	SHEET 1 OF 1

