
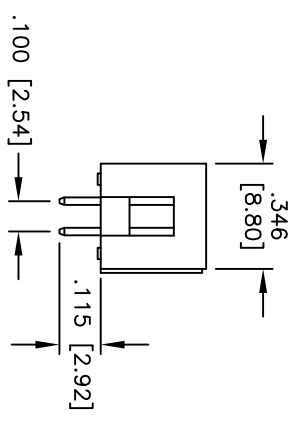
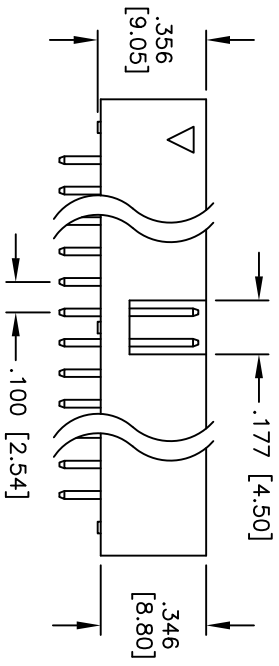
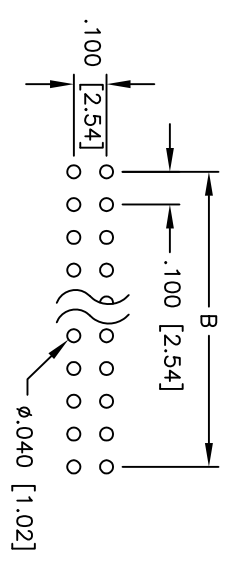


Rev	AWO #	Description	Date	Appr
-		RELEASED	2/22/10	

APPROVED: _____
 DATE: _____ TITLE: _____

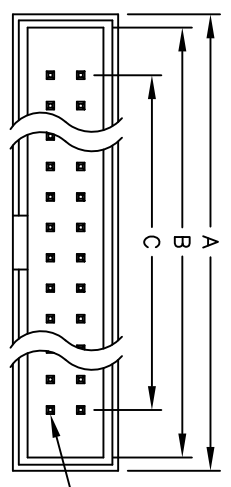

SPECIFICATIONS:
 Material: PBT, glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Plating: 30u" Gold over Nickel underplate on contact area, Tin over Copper underplate on tails.

A = .100 [2.54] X No. of Positions / 2 + .300 [7.62]
 B = .100 [2.54] X No. of Positions / 2 + .205 [5.20]
 C = .100 [2.54] X No. of Spaces

Electrical:
 Current rating: 3 Amps max.
 Contact resistance: 20 mohms max. initial
 Insulation resistance: 5,000 Mohms min.
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating: -40°C to +105°C
 Operating temperature: -40°C to +105°C
 Environmental: Lead free, RoHS compliant
 Recommended soldering temp: 235°C for 5 seconds



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

BOX HEADER, VERTICAL PCB MOUNT,
 2 ROW .100 PITCH, 30u" SEL GOLD FLASH

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES ARE NOTED INCHES	
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

REF: S00039T	SCALE: NTS	SHEET 1 OF 1
SIZE X	PART NO. BHR-XX-VSGB-115-30	REV. -

