
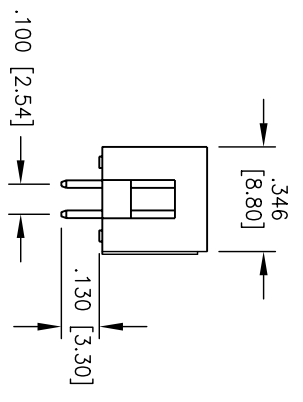
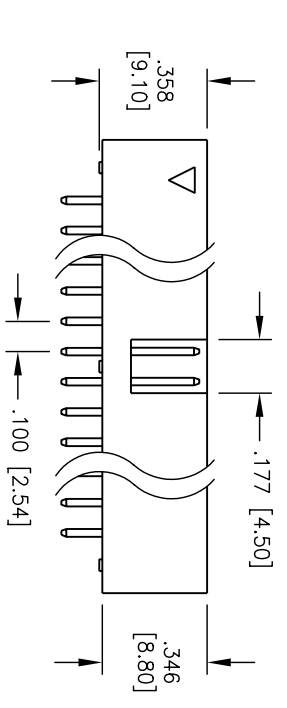
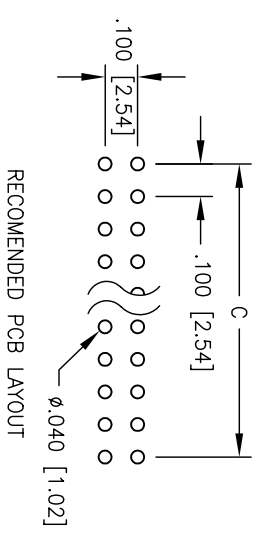


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/16/04	

APPROVED: _____
 DATE: _____ TITLE: _____

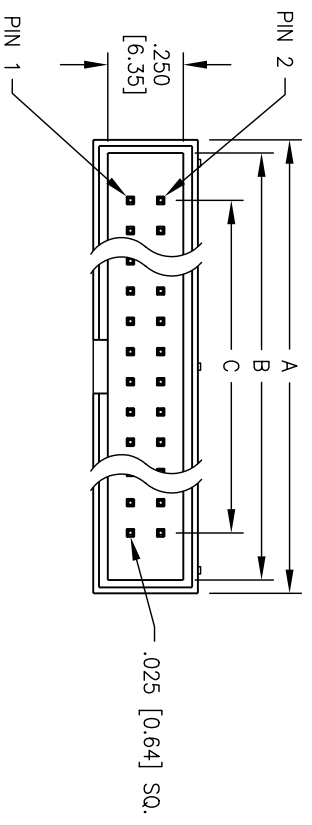

SPECIFICATION:

Material:

Insulator: PBT, glass reinforced, rated UL-94V-0
 Insulator Color: Black

Contact Plating:

Tin over Copper underplate overall

Electrical:

Operating Voltage: 250V AC max.

Current rating: 1 Amps max.

Contact resistance: 20 mohms max

Insulation resistance: 5000 Mohms min

Dielectric withstanding voltage: 1000 VAC / minute

Mechanical:

Mating durability: 500 cycles min.

Temperature Rating:

Operating temperature: -40° TO +105°

A = .100 [2.54] X No. of Positions /2 + .300 [7.60]
 B = .100 [2.54] X No. of Positions /2 + .200 [5.08]
 C = .100 [2.54] X No. of Spaces

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: BOX HEADER, VERTICAL PCB MOUNT,
 2 ROW .100 PITCH, TIN PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		DRAWN: SS		DATE: 11/16/04	
INCHES: ±.10		CHECKED:		APPROVALS:	
HOLES: ±.10		APPROVED:		DATE:	
X ±.020		SIZE: X		PART NO.: BHR-XX-VTA	
.XX ±.015		REF:		SCALE: NTS	
XXX ±.010		REV: -		SHEET 1 OF 1	