
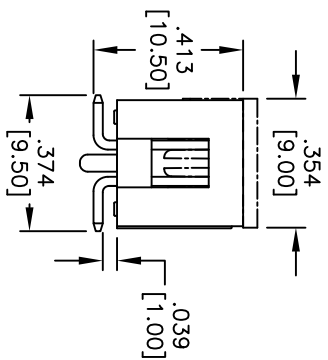
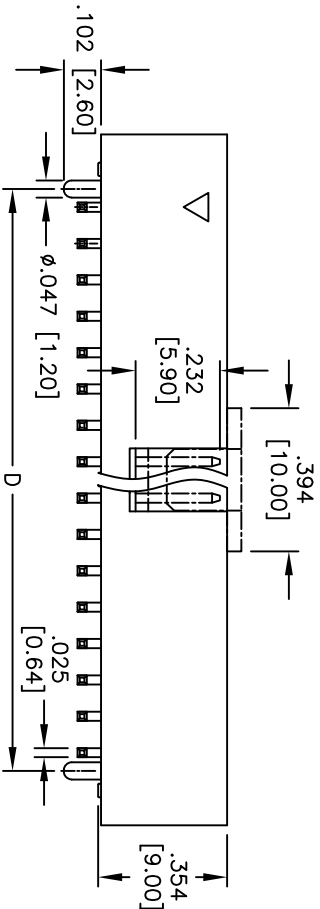
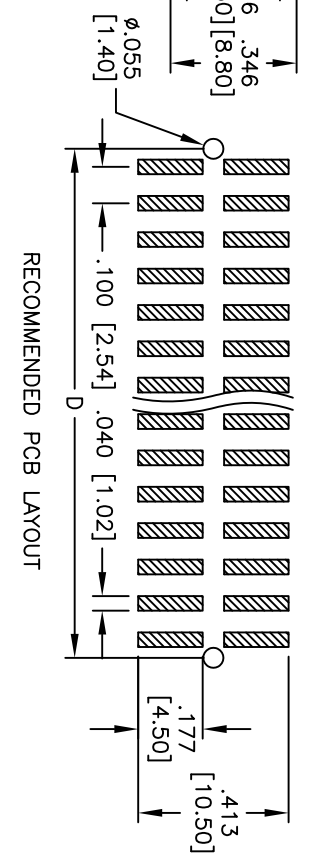


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/24/09	

APPROVED: _____
 DATE: _____ TITLE: _____

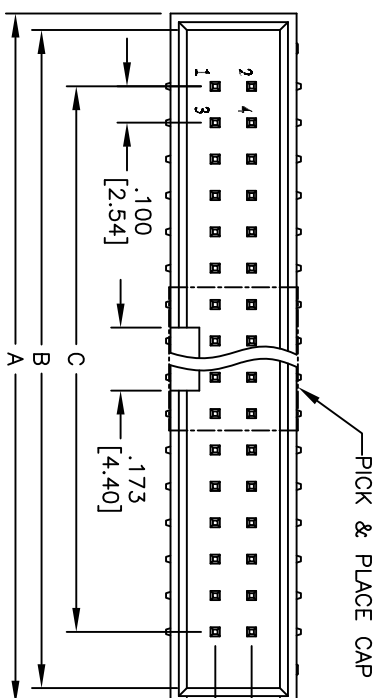

PACKAGED ON TAPE & REEL

SPECIFICATIONS:
 Material: Nylon 6T, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass

Plating:
 10u" Gold over Nickel underplate overall.

Electrical:
 Current rating: 3 Amps max
 Contact resistance: 20 mohms max
 Insulation resistance: 1000 Mohms min
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS Compliant

Recommended soldering temp: 260°C for 5 seconds



Positions: 10 thru 64
 A = .100 [2.54] X No. of Positions per row + .300 [7.62]
 B = .100 [2.54] X No. of Positions per row + .209 [5.32]
 C = .100 [2.54] X No. of Spaces
 D = .100 [2.54] X No. of Positions per row

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE MM [INCHES]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

APPROVALS	DATE	TITLE	SIZE	PART NO.	REV.
DRAWN	DY	11/24/09	X	BHR-XX-VUA-SMT-10-P-PP-TR	-
CHECKED					
APPROVED					

REF: S00019C SCALE: NTS SHEET 1 OF 1