
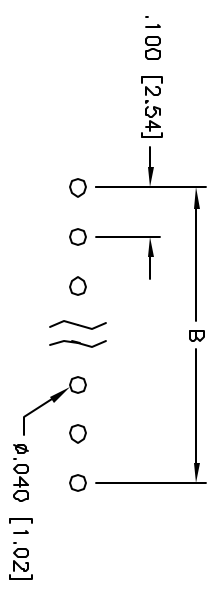
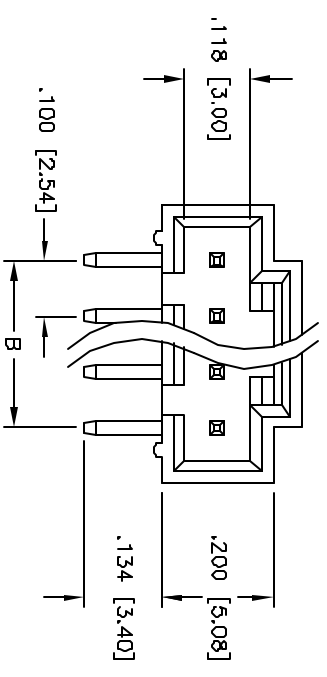
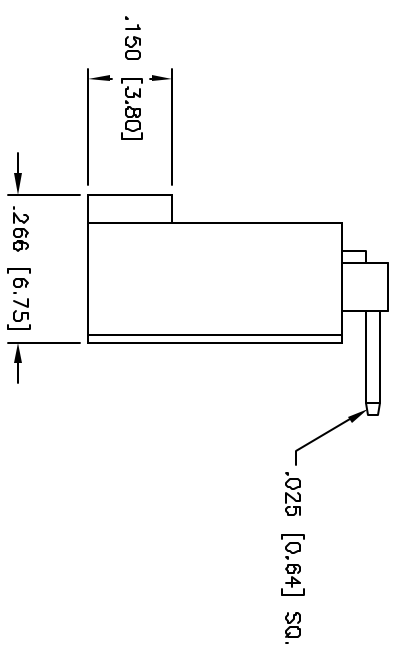


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/7/05	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

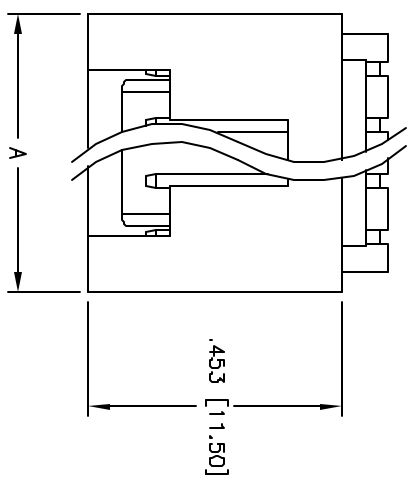

Positions: 2 thru 12  
 $A = .100 [2.54]$  x No. of Positions +  $.100 [2.54]$   
 $B = .100 [2.54]$  x No. of Spaces

**SPECIFICATIONS:**  
 Material: Insulator: Nylon 66, glass reinforced, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Phosphor Bronze  
 Plating: Gold flash over Nickel underplate overall  
 Electrical: Operating voltage: 250 VAC max  
 Current rating: 3 Amps max  
 Contact resistance: 30 mohms max  
 Insulation resistance: 1,000 Mohms min @ 500 VDC  
 Dielectric withstanding voltage: 500 VAC for 1 minute  
 Temperature Rating: Operating temperature:  $-40^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$



Environmental: Lead free, RoHS compliant  
 Recommended soldering temp:  $230^{\circ}\text{C}$  for 5 seconds

UNLESS OTHERWISE SPECIFIED	
ALL DIMENSIONS ARE NICHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLE
X ± .10	ØX ± .10
XX ± .020	ØXX ± .019
XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN SS	4/7/05
CHECKED	
APPROVED	

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: **.100 [2.54] LATCHING HEADER**  
 RIGHT ANGLE PCB

SIZE	PART NO.	REV.
X	CR-XX-GR	-
REF:	SCALE: NTS	SHEET 1 OF 1