
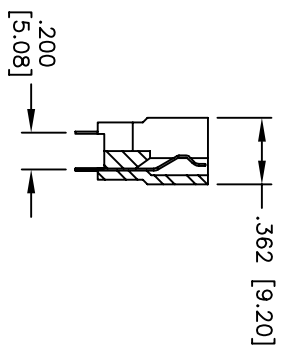
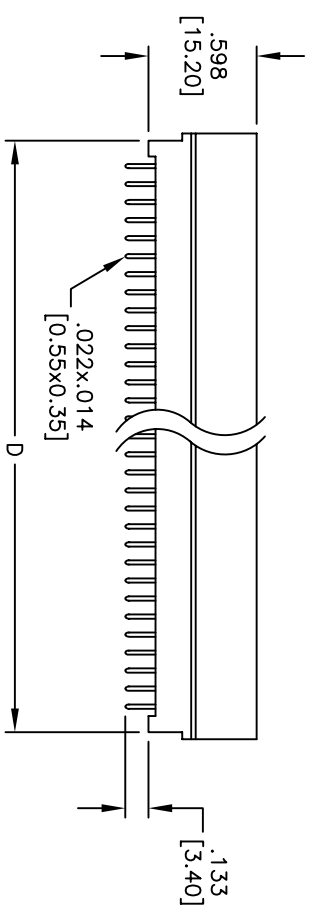
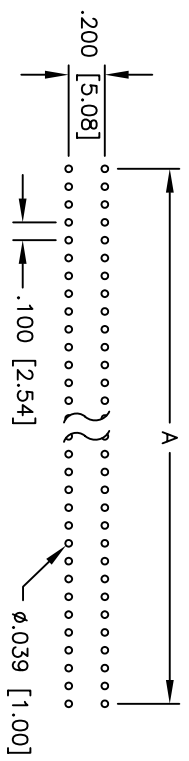


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/31/06	
A		UPDATED POSITIONS	8/23/06	

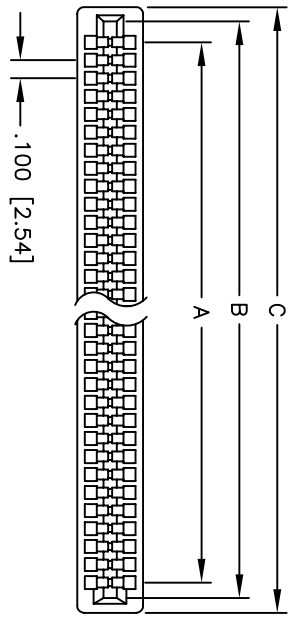

Positions: 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 28, 30, 32, 24, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 64, 66, 68, 70, 72, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 96, 100, 102, 106, 108, 110, 112, 114, 116, 118

A = .100 [2.54] x No. of Spaces
 B = A + .200 [5.08]
 C = A + .360 [9.14]
 D = A + .257 [6.54]

SPECIFICATIONS:
 Material: PBT, Glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Copper Alloy
 Plating: Gold flash over Nickel underplate on contact area, Tin over Copper underplate on PCB tails
 Electrical: Operating voltage: 250 VAC max.
 Current rating: 3 Amps max.
 Contact resistance: 30 mohms max. initial
 Insulation resistance: 3,000 Mohms min.
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating: Operating temperature: -40°C to +105°C
 Environmental: Lead free, RoHS complaint
 Recommended soldering temp: 235°C for 5 seconds



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN	LFJ
CHECKED	
APPROVED	

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: CARD EDGE CONNECTOR
 VERTICAL, PCB

SIZE: X PART NO.: CE-XX-U
 SCALE: NTS SHEET 1 OF 1