
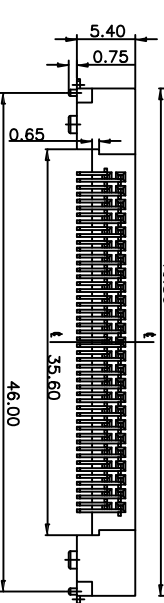
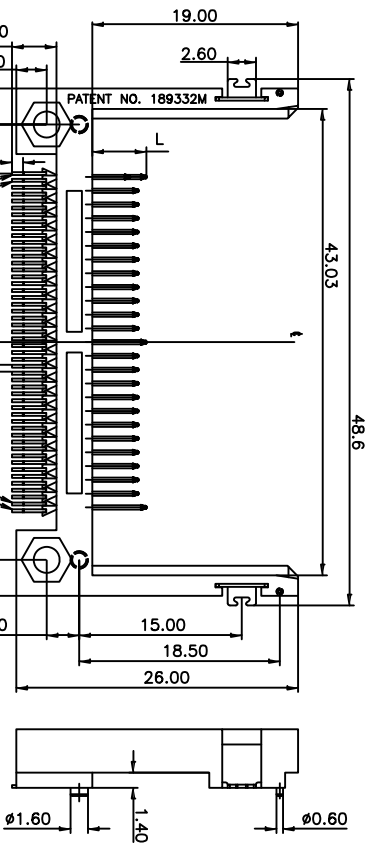




Rev	AWO #	Description	Date	Appr
-		RELEASED	3/08/11	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

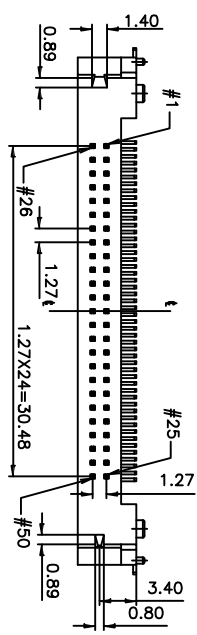

For SIP  
 For crnk/cpk

PIN TYPE	DIM. L	PIN NO.
POWER	5.00mm	1,13,38,50
GENERAL	4.25mm	All other pins
DETECT	3.50mm	25,26

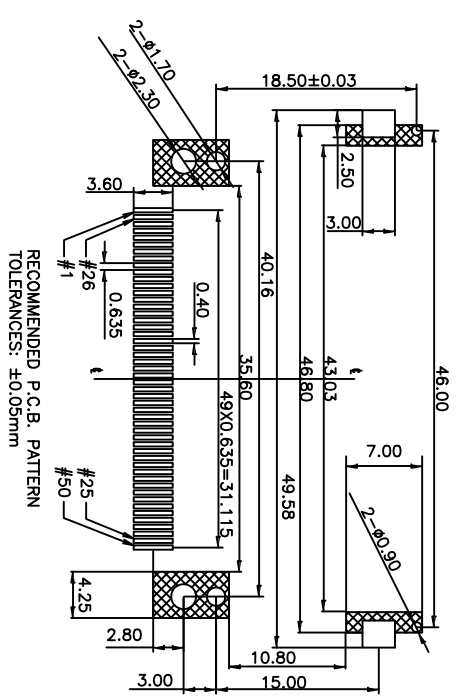

☒ = With Out The Component

**SPECIFICATIONS:**

Material: Insulator: Thermal Plastic, rated UL 94V-0, color White  
 Contacts: Copper Alloy  
 Shell: Copper Alloy  
 Plating: Gold flash over Nickel underplate on contact area, Tin over copper underplate on tails.

Electrical: Operating Voltage: 100 VACmax  
 Current rating: 0.5 Amp max  
 Contact resistance: 40 mohms max  
 Insulation resistance: 1,000 Mohms min  
 Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating: Operating temperature: -20°C to +90°C  
 Environmental: Lead free, RoHS compliant  
 Recommended soldering temp: 260°C for 5 seconds



6 5 4 3 2 1

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE MM  
 TOLERANCES EXCEPT AS NOTED  
 INCHES

.X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010

APPROVALS

DRAWN	DY	DATE
CHECKED		3/08/11
APPROVED		

**ADAM TECH**  
 909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: CF SOCKET, SLIM TYPE, REVERSE TYPE

SIZE	PART NO.
X	CF2A-50-SGR-C1
REF:	S00009T
SCALE:	NTS
SHEET	1 OF 1