

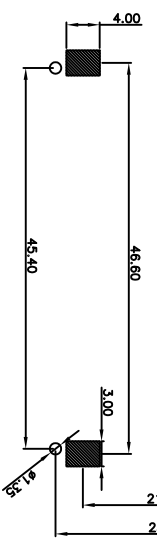
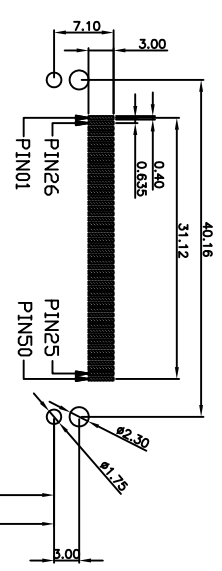
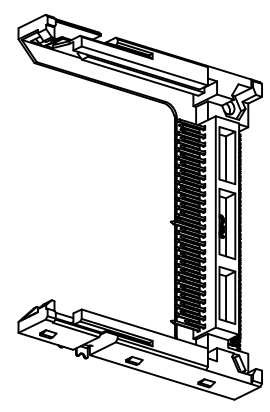


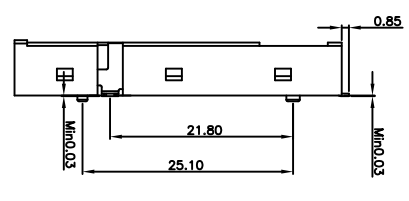
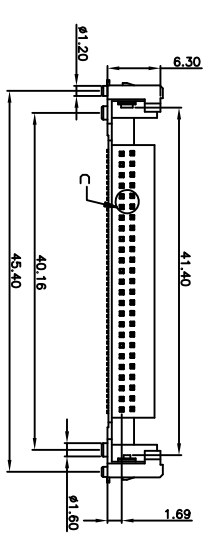


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/31/10	

APPROVED: _____ TITLE: _____
 DATE: _____

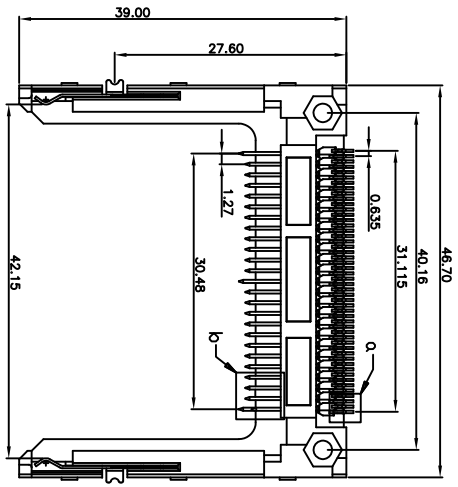

DETAIL C SCALE 3/1

DETAIL b SCALE 3/1

RECOMMENDED PCB LAYOUT

DETAIL c SCALE 3/1

SPECIFICATIONS:
 Material: Insulator: Hi-temp thermoplastic, rated UL 94V-0, color Black
 Contacts: Copper Alloy
 Plating: Gold flash over Nickel underplate on contact area, Tin over copper underplate on tails.
 Electrical:
 Operating Voltage: 250 VACmax
 Current rating: 0.5 Amp max
 Contact resistance: 100 mohms max
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating: Operating temperature: -25°C to +90°C
 Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 seconds



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE MM
 TOLERANCES: EXCEPT AS NOTED
 INCHES
 .X ± .10 ØX ± .10
 .XX ± .020 ØXX ± .015
 .XXX ± .015 ØXXX ± .010
 APPROVALS DATE

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710
 TITLE: COMPACT FLASH, MALE, UPPER BOARD,
 W/SCREW HOLE, 6.3MM THICKNESS

DRAWN	DY	12/31/10
CHECKED		
APPROVED		

SIZE	PART NO.	REV.
X	CF2B-50-SG-BK	-
REF:	S00177T	SHEET 1 OF 1