
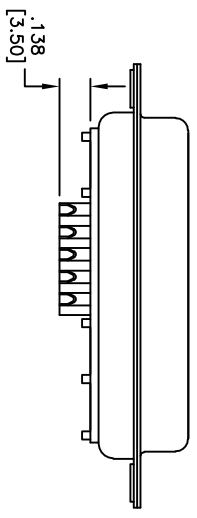



Rev	AWO #	Description	Date	Appr
-		RELEASED	12/20/10	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

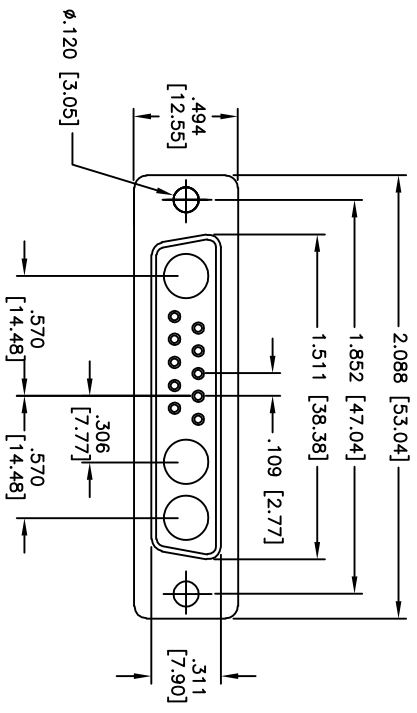

**SPECIFICATIONS:**

- Material: Thermoplastic, glass reinforced, rated UL 94V-0
- Insulator color: Black
- Contacts: Brass
- Shell: Steel, Tin plated
- Hardware: Brass, Nickel plated
- Plating: Gold flash over Nickel underplate overall
- Electrical:
  - Operating voltage: 250 VAC max
  - Current rating: 10 – 40 Amps max
  - Contact resistance: 10 mohms max
  - Insulation resistance: 5,000 Mohms min
  - Dielectric withstanding voltage: 1,000 VAC for 1 minute
- Temperature Rating:
  - Operating temperature: -55°C to +125°C
- Environmental: Lead free, RoHS compliant



**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

**D-SUB POWER SOCKET, D13W3, STRAIGHT, FEMALE, SOLDER TYPE**

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
INCHES		HOLE SIZE	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XXX	± .015
.XXX	± .015	Ø.XXXX	± .010
APPROVALS		DATE	
DRAWN	AY		12/20/10
CHECKED	VW		12/20/10
APPROVED			
TITLE		SIZE	PART NO.
D-SUB POWER SOCKET, D13W3, STRAIGHT, FEMALE, SOLDER TYPE		X	D13W3-SD-1-NCC
REF: S0009T		SCALE: NTS	SHEET 1 OF 1