

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/10/09	

6

5

4

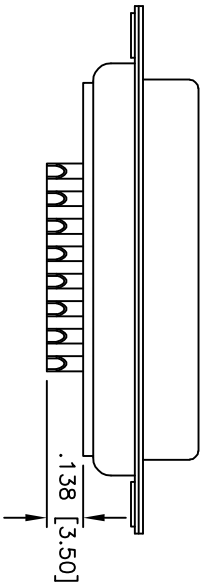
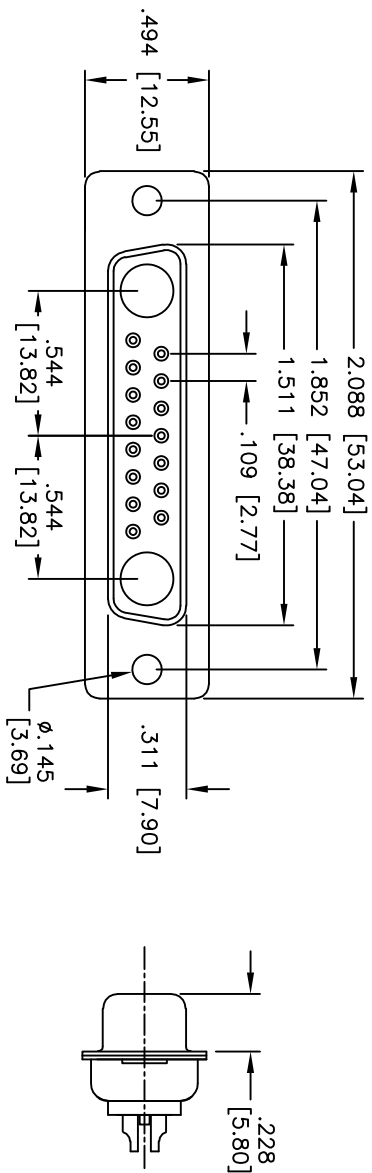
3

2

1

APPROVED: _____

DATE: _____ TITLE: _____

**SPECIFICATIONS:****Material:**

Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: Black

Power Contact: Brass, Gold plated

Signal Contact: Brass, Gold plated

Metal Bracket: Steel, Nickel plated

Boardlock: Brass, Nickel plated

Screw: Brass, Nickel plated

Electrical:

Signal contact: 5 Amp max

Power contact: 10 – 40 Amp

Contact resistance: 10 mohms max

Insulation resistance: 5,000 Mohms min

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Environmental:

Temperature Rating:

Operating temperature: -55°C to +125°C

Lead free, RoHS compliant

Recommended soldering temp: 235°C for 5 seconds

**ADAM TECH**909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

D-SUB CONNECTOR, SOCKET, SOLDER TYPE

TITLE

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES	HOLDS	[MM]
.X	± .10	ØXX ± .10
.XX	± .020	ØXXX ± .015
.XXX	± .015	ØXXXX ± .010

APPROVALS

DATE	DATE
11/10/09	

DRAWN DY

CHECKED

APPROVED

SIZE	PART NO.	REV.
X	D17W2-SD-NA-1	-

REF: S00019T SCALE: NTS SHEET 1 OF 1

A

B

C

D

6

5

4

3

2

1