
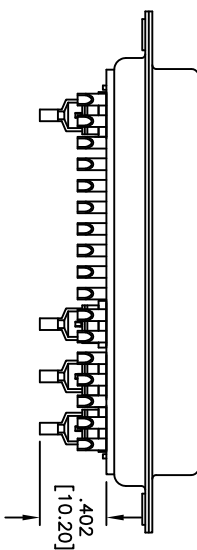



Rev	AWO #	Description	Date	Appr
-		RELEASED	9/15/10	

APPROVED: _____
 DATE: _____ TITLE: _____

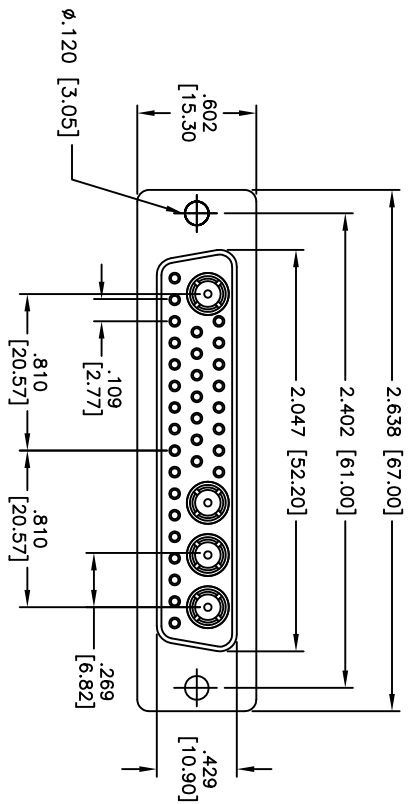

SPECIFICATIONS:

- Material: Insulator: PBT, 30% glass reinforced, rated UL 94V-0
- Insulator color: Black
- Coaxial center Insulator: Teflon
- Coaxial center Insulator color: White
- Contacts: Brass
- Shell: Steel, Tin plated
- Hardware: Brass, Nickel plated
- Plating: Gold flash over Nickel underplate overall
- Electrical: Operating voltage: 250 VAC max
- Current rating: 10 – 40 Amps max (See Chart)
- Contact resistance: 10 mohms max
- Insulation resistance: 5,000 Mohms min
- Dielectric withstanding voltage: 1,000 VAC for 1 minute
- Temperature Rating: Operating temperature: -55°C to +280°C
- Environmental: Lead free, RoHS compliant

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

D-SUB POWER SOCKET, D36W4, STRAIGHT, FEMALE, SOLDER CUP

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES	INCHES	HOLES
.X ± .10	ØX ± .10	.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010		
APPROVALS		DATE	
DRAWN	AY	9/15/10	
CHECKED	VW	9/15/10	
APPROVED			
TITLE		SIZE	PART NO.
D-SUB POWER SOCKET, D36W4, STRAIGHT, FEMALE, SOLDER CUP		X	D36W4-SD-1-1
REF: S0009T		SCALE: NTS	SHEET 1 OF 1

