
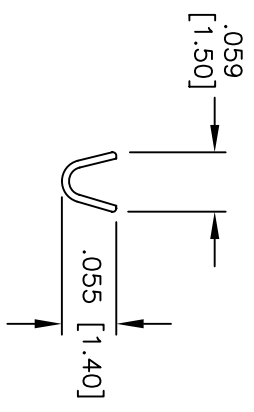
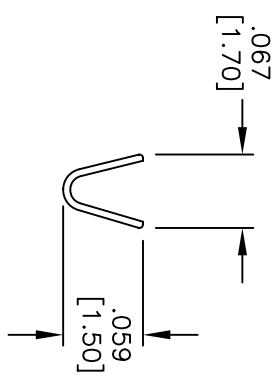
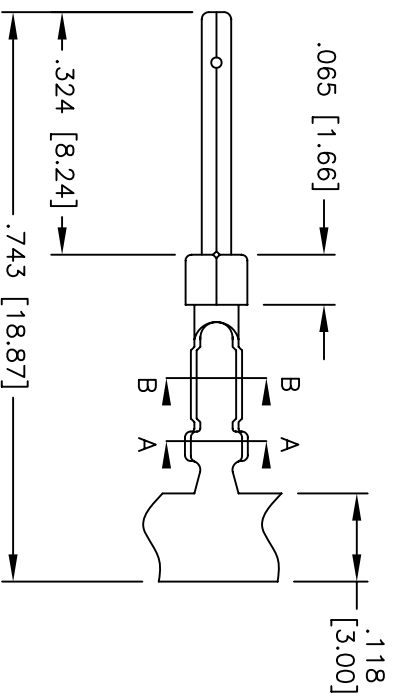


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/11/05	
A		REVISED LOW FEET DIM.	3/20/08	

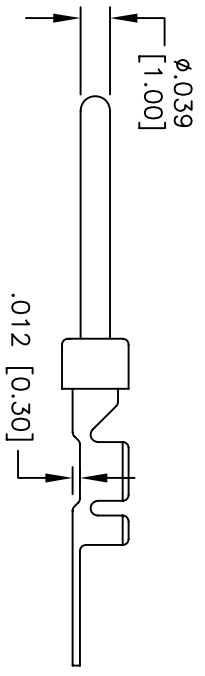

SPECIFICATIONS:

- Material: Contact: Phosphor Bronze
- Plating: 30u" Gold over Nickel underplate overall
- Electrical: Operating voltage: 250 VAC max
- Current rating: 5 Amps max
- Contact resistance: 20 mohms max initial
- Mechanical: Recommended wire range: 24-28 AWG
- Temperature Rating: Operating temperature: -65°C to +125°C
- Packaging: R = 10,000 Pieces on reel
B = 1,000 Pieces loose cut
- Environmental: Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	SS
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: D-SUB PLUG CONTACT, 24 - 28 AWG
 30u" GOLD

SIZE: X
 PART NO.: DCP-01-X-30
 SCALE: NTS
 SHEET 1 OF 1