

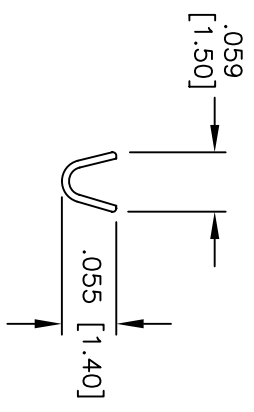
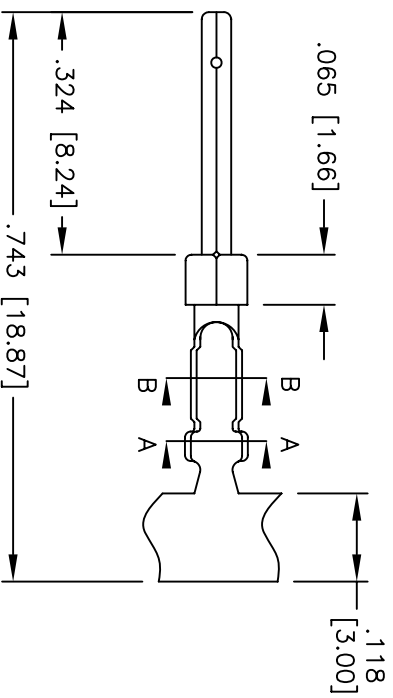


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/11/05	
A		REVISED LOW FEET DIM.	3/20/08	

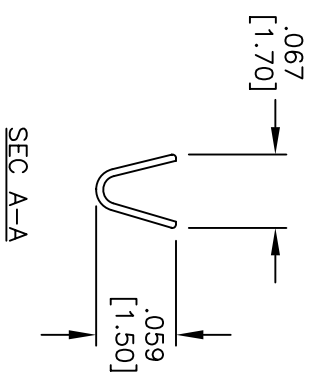

**SPECIFICATIONS:**  
 Material: Phosphor Bronze  
 Contact: Phosphor Bronze  
 Plating: Gold flash over Nickel underplate overall  
 Electrical: Gold flash over Nickel underplate overall  
 Operating voltage: 250 VAC max  
 Current rating: 5 Amps max  
 Contact resistance: 20 mohms max initial  
 Mechanical: Recommended wire range: 24-28 AWG  
 Temperature Rating: Operating temperature: -65°C to +125°C  
 Packaging: R = 10,000 Pieces on reel  
 B = 1,000 Pieces loose cut  
 Environmental: Lead free, RoHS compliant

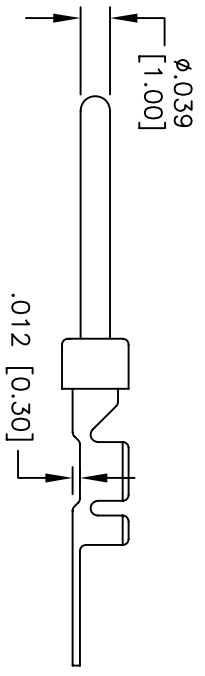

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN SS	1/11/05
CHECKED	
APPROVED	

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: D-SUB PLUG CONTACT, 24 - 28 AWG GOLD FLASH

SIZE: X PART NO.: DCP-01-X

SCALE: NTS SHEET 1 OF 1