
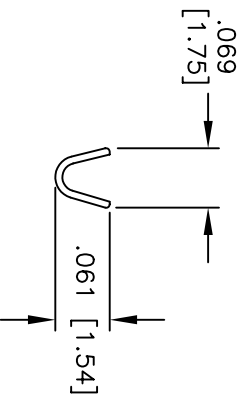
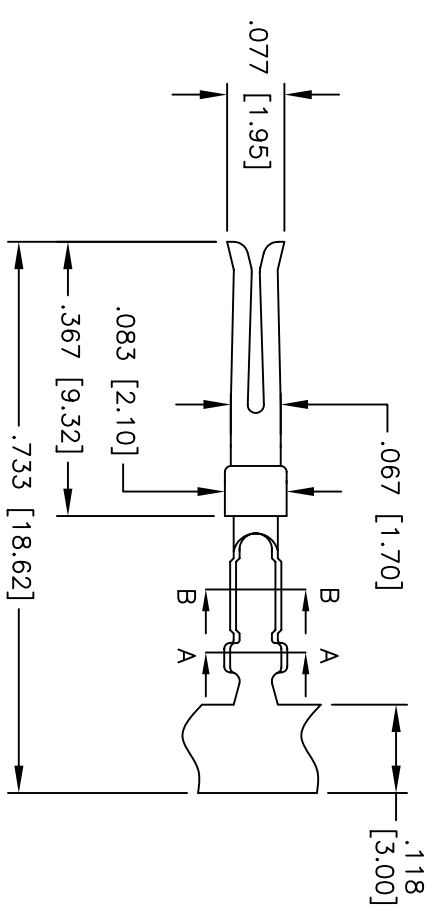
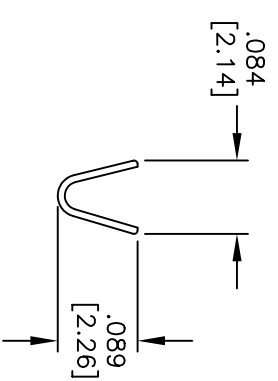


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/11/05	

APPROVED: _____
 DATE: _____ TITLE: _____

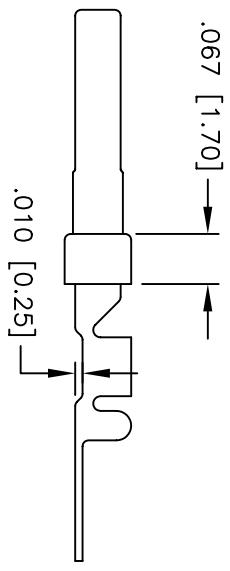

SPECIFICATIONS:
 Material: Phosphor Bronze
 Contact: Phosphor Bronze
 Plating: 30 μ in. Gold over Nickel underplate
 Electrical:
 Operating voltage: 250 VAC max
 Current rating: 5 Amps max
 Contact resistance: 20 mohms max initial
 Mechanical:
 Recommended wire range: 24 - 26 Awg
 Temperature Rating:
 Operating temperature: -65°C to +125°C

PACKAGING:
 R=10,000 PIECE REEL
 B=1,000 PIECES LOOSE CUT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010
APPROVALS	DATE
DRAWN SS	1/11/05
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: D-SUB SOCKET CONTACT, 24 - 26 AWG,
 30 μ in. GOLD

SIZE	PART NO.	REV.
X	DCS-01-X-30	-
REF:	SCALE: NTS	SHEET 1 OF 1