
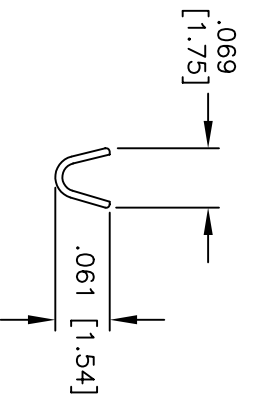
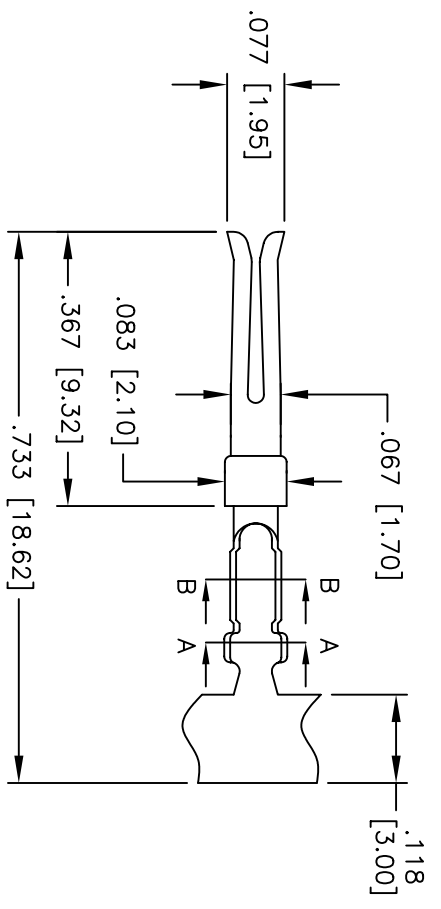
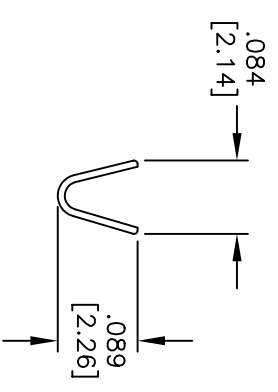


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/11/05	

APPROVED: _____
 DATE: _____ TITLE: _____

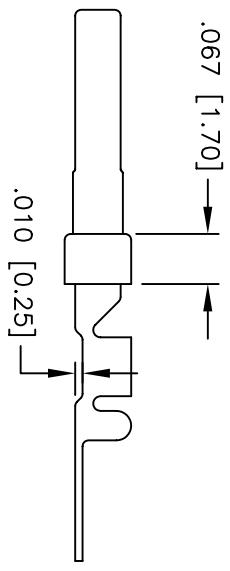

SEC B-B

SEC A-A

SPECIFICATIONS:

- Material: Phosphor Bronze
- Contact: Phosphor Bronze
- Plating: Gold Flash over Nickel underplate
- Electrical:
 - Operating voltage: 250 VAC max
 - Current rating: 5 Amps max
 - Contact resistance: 20 mohms max initial
- Mechanical:
 - Recommended wire range: 24 - 26 Awg
 - Temperature Rating: Operating temperature: -65°C to +125°C
- Packaging: R=10,000 PIECE REEL
B=1,000 PIECES LOOSE CUT

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

D-SUB SOCKET CONTACT, 24 - 26 AWG, GOLD FLASH

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN SS	1/11/05
CHECKED	
APPROVED	

TITLE	D-SUB SOCKET CONTACT, 24 - 26 AWG, GOLD FLASH	
SIZE	PART NO.	REV.
X	DCS-01-X	-
REF:	SCALE: NTS	SHEET 1 OF 1