






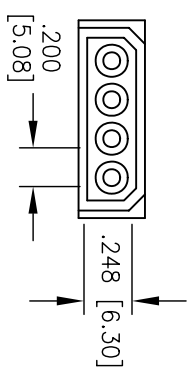
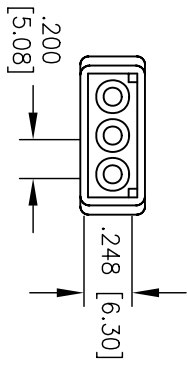


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/14/04	

APPROVED: _____ TITLE: _____
 DATE: _____

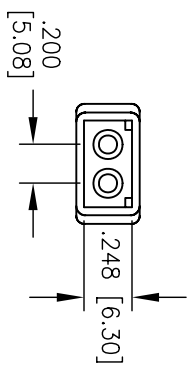

DDH-02

DDH-03

DDH-04

.299 [7.60]

Note: Female crimp P/N: DMC-01-R

SPECIFICATIONS:

Material: Nylon 66, rated UL 94V-2
 Insulator color: Natural
 Electrical:
 Operating voltage: 250 VAC max
 Current rating: 5 Amps max
 Insulation resistance: 1000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1500 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -25°C to +85°C

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

DISK DRIVE MALE HOUSING
 2, 3 & 4 POSITION

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		TITLE	
INCHES	HOLES	DISK DRIVE MALE HOUSING	
X ± .10	ØX ± .015	SIZE	PART NO.
.XX ± .020	ØXXX ± .015	X	DDH-XX
.XXX ± .015	ØXXXX ± .010	REF:	SCALE: NTS
APPROVALS	DATE	SHEET 1 OF 1	
DRAWN SS	9/14/04	REV: -	
CHECKED			
APPROVED			