
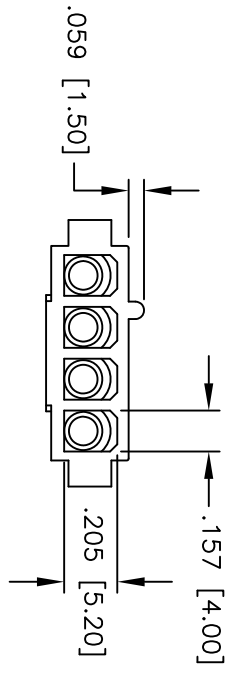
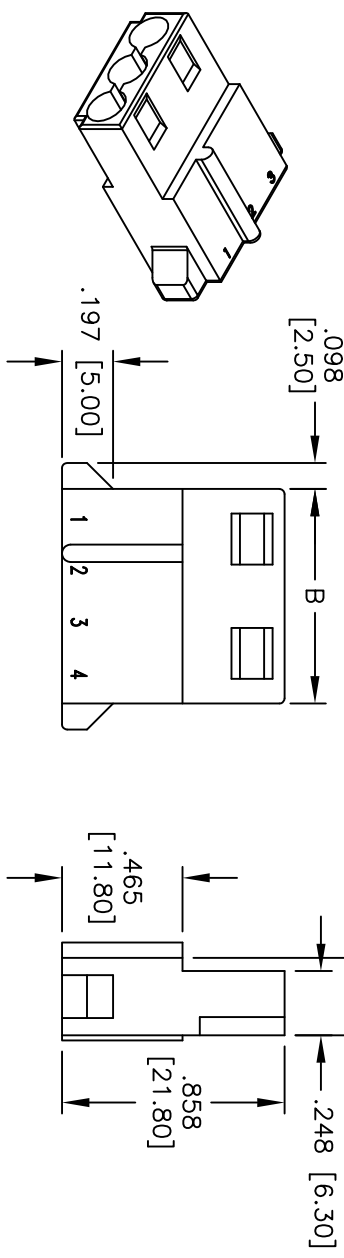


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/05/10	

APPROVED: _____
 DATE: _____ TITLE: _____

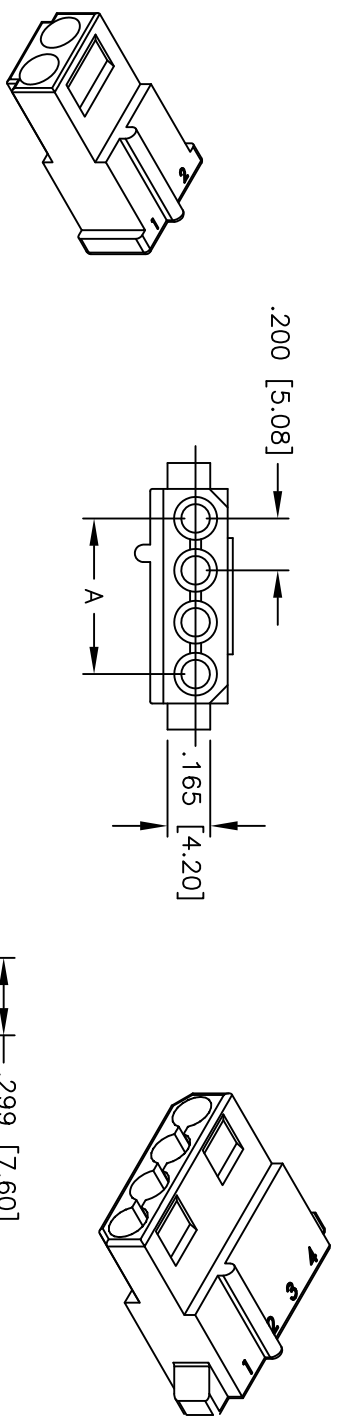

ADAM P/N	A	B
DDH-02A	.200 [5.08]	.427 [10.84]
DDH-03A	.400 [10.16]	.627 [15.92]
DDH-04A	.600 [15.24]	.827 [21.00]

SPECIFICATIONS:

Material:
 Insulator: Nylon 66, rated UL 94V-2
 Insulator color: Natural
Electrical:
 Operating voltage: 250 V AC,DC
 Current rating: 7 Amps max
 Insulation resistance: 1000 Mohms min
 Dielectric withstanding voltage: 1500 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -40°C to +105°C



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLEES

.X	± .10	∅XX	± .10
.XX	± .020	∅XXX	± .015
.XXX	± .015	∅XXXX	± .010

APPROVALS

DRAWN	DY	5/05/10
CHECKED		
APPROVED		

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .200 [5.08] DISK DRIVE POWER CONNECTOR
 2, 3 & 4 POSITION

SIZE PART NO. DDH-XXA
 REF: S0004T SCALE: NTS SHEET 1 OF 1