
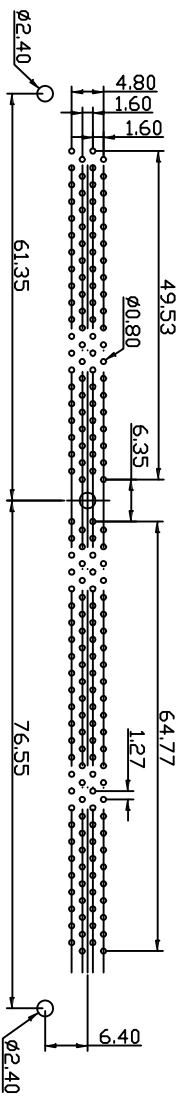
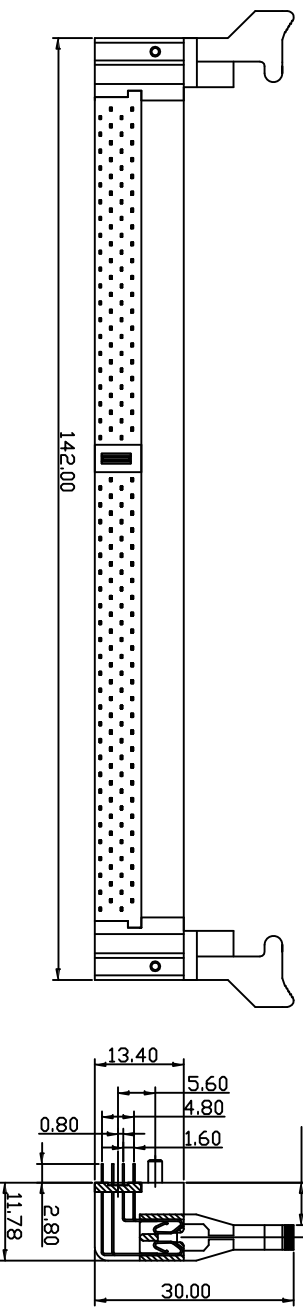


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/09/10	

APPROVED: _____ TITLE: _____
 DATE: _____

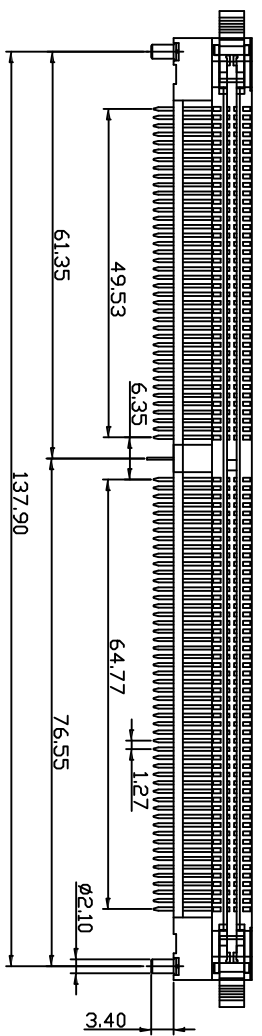

TOP VIEW
 PCB LAYOUT RECOMMENDED

SPECIFICATIONS:

Material:
 Insulator: LCP, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
Plating:
 Gold Flash over Nickel on contact area,
 Tin over Nickel underplate on tails

Electrical:
 Operating voltage: 250 VAC max
 Current rating: 1 Amps max
 Contact resistance: 30 mohms max
 Insulation resistance: 1000 Mohms min
 Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
 Operating temperature: -25°C to +105°C
 Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 260°C for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: DDR SOCKET, 184P, RIGHT ANGLE,
 REVERSE, PCB MOUNT, 2.5V KEY

SIZE	PART NO.	REV.
X	DDR-184-RA-3	
REF: S00127T	SCALE: NTS	SHEET 1 OF 1