

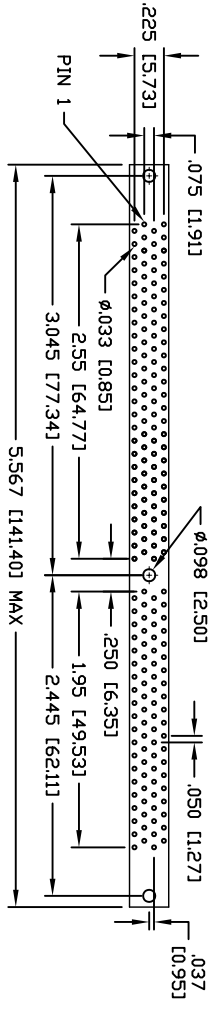

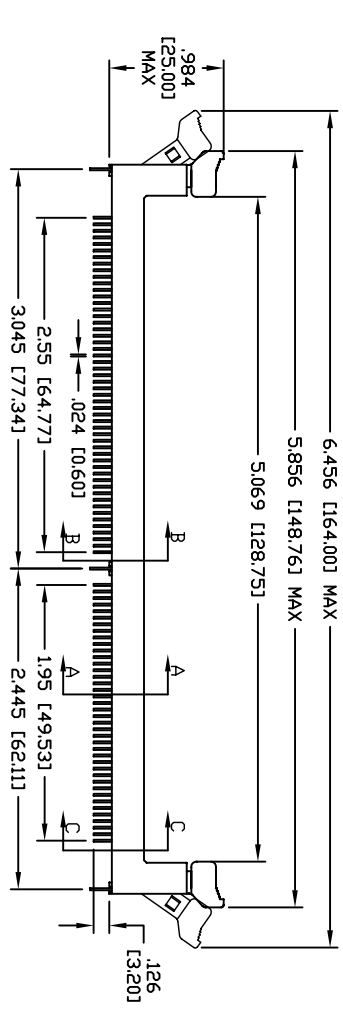



APPROVED: _____	DATE: _____	TITLE: _____
Rev	AWO #	Description
-		RELEASED
		XXXXXX
		Date
		XXXXXX
		Appr

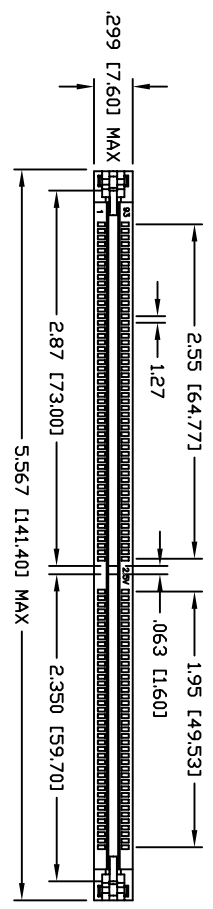

RECOMMENDED PCB LAYOUT

DETAIL C-C

SPECIFICATIONS:

Material:

Insulator: Nylon 6T, rated UL 94V-0
 Insulator color: Black
 Ejector: Nylon 66, rated UL 94V-0 color White
 Contacts: Phosphor Bronze

Plating:

Gold Flash over Nickel

Electrical:

Operating voltage: 250 VAC max
 Current rating: 0.5 Amps max
 Contact resistance: 30 mohms max
 Insulation resistance: 1000 Mohms min
 Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -55C to +105C

Environmental:

Lead free, RoHS compliant.
 Recommended soldering temp: 260 for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010
APPROVALS	DATE
DRAWN	SS
CHECKED	
APPROVED	04/07/05

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: DDR SOCKET, 184P, VERTICAL, PCB MOUNT, 2.5V KEY

SIZE	PART NO.	REV.
X	DDR-184-V-3	-
REF:	SCALE: NTS	SHEET 1 OF 1