

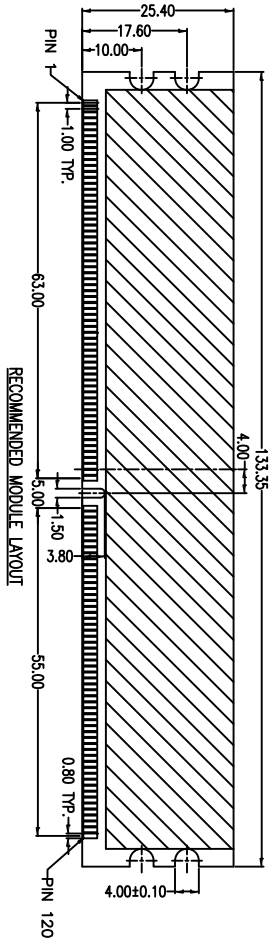
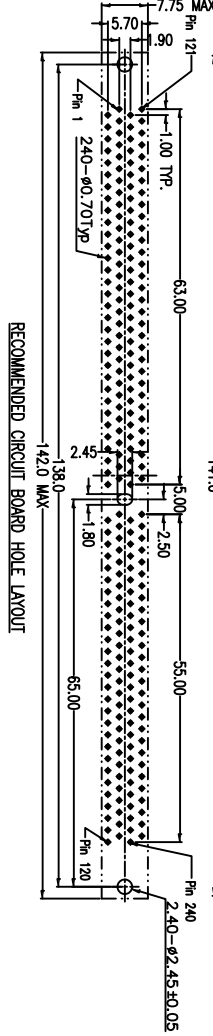
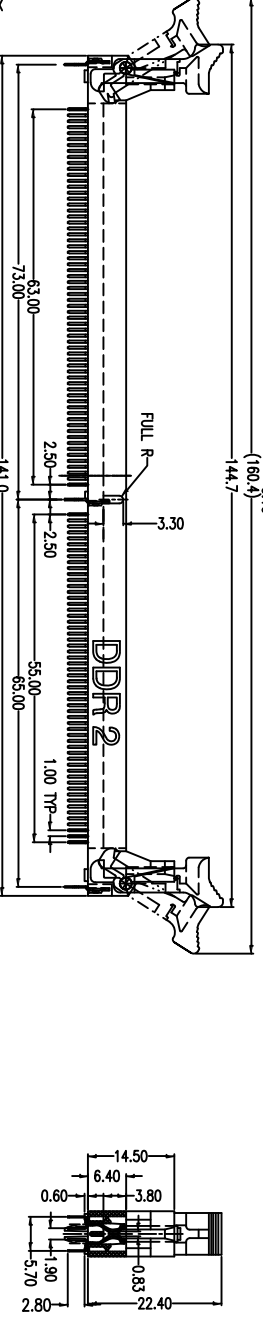


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/26/11	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

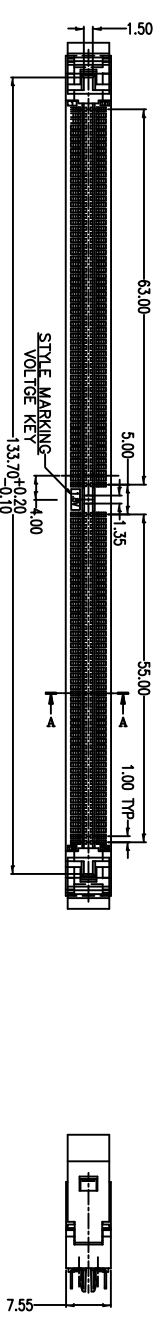

**SPECIFICATIONS:**

**Material:**  
 Insulator: Nylon 66, Glass filled, rated UL 94V-0  
 Insulator color: Black  
 Ejector: Nylon 66, rated UL 94V-0 color Ivory  
 Contacts: Brass

**Plating:**  
 Gold Flash over Nickel on contact area,  
 Tin over Nickel underplate on tails

**Electrical:**  
 Contact resistance: 30 mohms max. initial  
 Insulation resistance: 1000 Mohms min @ 500VDC  
 Withstand voltage: 500V AC

**Temperature Rating:**  
 Operating temperature: -55°C to +105°C

**Environmental:**  
 Lead free, RoHS compliant.  
 Recommended soldering temp: 260°C for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XXX ± .015
.XXX ± .015	Ø.XXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

**ADAM TECH**  
 909 Ratway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: DDR SOCKET, 240P, VERTICAL, PCB MOUNT, 1.8V KEY

SIZE	PART NO.	REV.
X	DDR-240-V-5	
REF: S00078T	SCALE: NTS	SHEET 1 OF 1