

6

5

4

3

2


1

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/16/09	


APPROVED: _____

DATE: _____ TITLE: _____


D

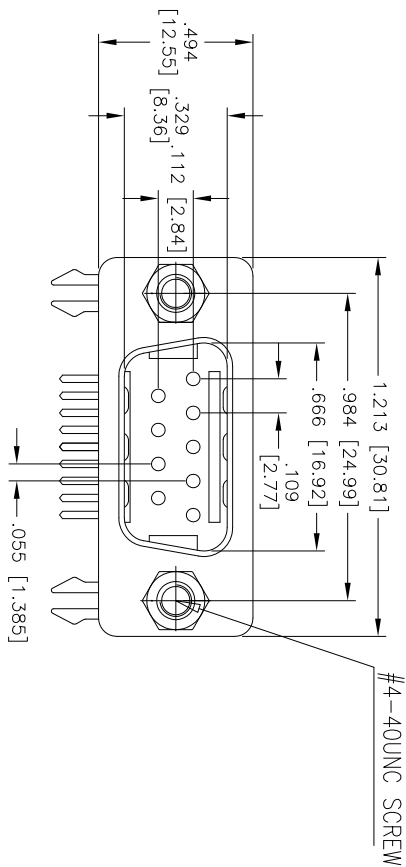


C

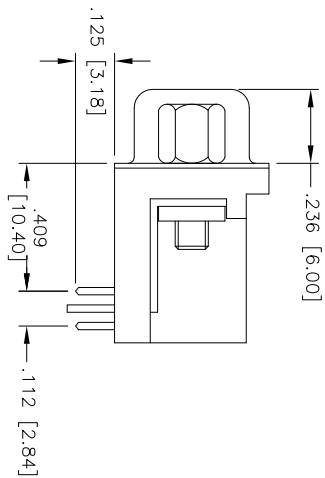

B

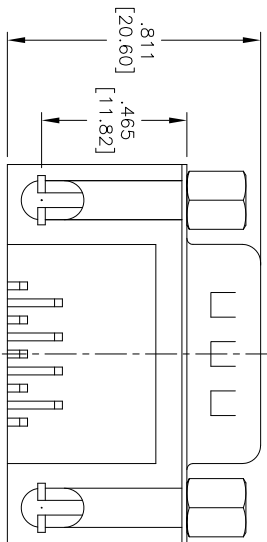

B

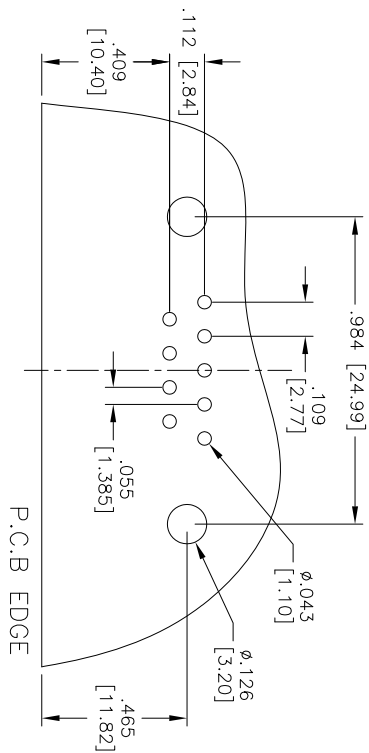

RECOMMENDED P.C.B LAYOUT

SPECIFICATIONS:

Material:

Insulator: PBT, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Shell: Cold Roller Steel, Nickel plated

Plating:

Gold flash over Nickel underplate on contact area,

Tin over Copper underplate on tails.

Electrical:

Current rating: 3 Amps max.

Contact resistance: 25 milliohms max.

Insulation resistance: 5,000 Medohms min.@DC 500V

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:

Operating temperature: -55°C to +105°C

Environmental:

Lead free, RoHS compliant.

Recommended soldering temp: 235°C for 5 sec.



6

5

4

3

2

1

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: D-SUB MALE, .409 [10.40] FOOTPRINT, R/A
#4-40 FIXED JACKSCREWS, FORKED BORARD LOCKS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS TOLERANCES: EXCEPT AS NOTED INCHES		HOLE SIZES	
.X	± 0.25	ØXXX	± 0.13
.XX	± 0.15		
.XXX	± 0.05		
APPROVALS		DATE	
DRAWN	DY	11/16/09	
CHECKED			
APPROVED			

SIZE	PART NO.	REV.
X	DE09-PK-23	-
REF:	S00027T	SCALE: NTS
		SHEET 1 OF 1