
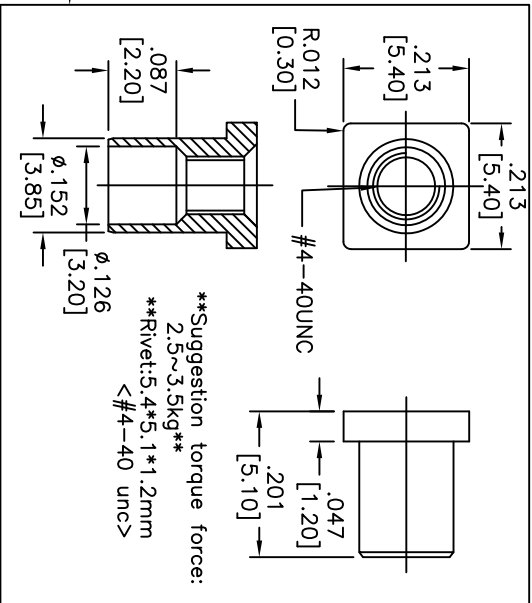

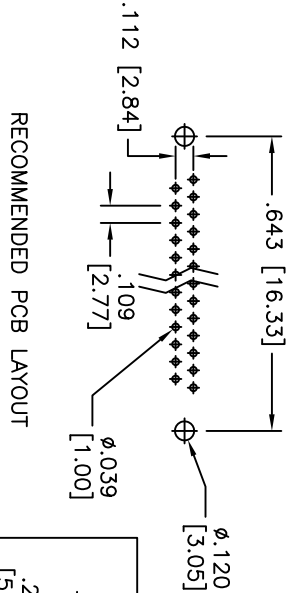


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/10/10	

APPROVED: _____
 DATE: _____ TITLE: _____

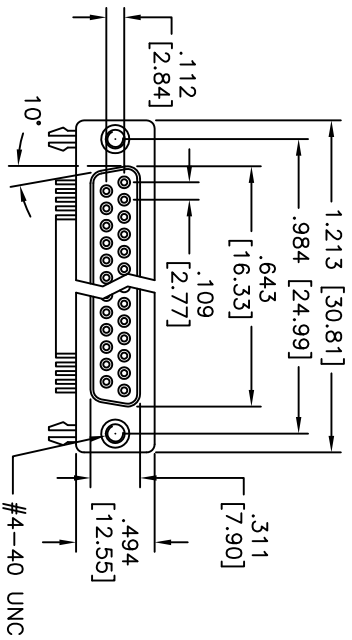

***Suggestion torque force:
 2.5~3.5kg**
 **Rivet:5.4*5.1*1.2mm
 <#4-40 unc>

SPECIFICATIONS:

- Material: PBT, glass reinforced, rated UL 94V-0
- Insulator color: Black
- Contacts: Copper Alloy
- Shell: Steel, Tin plated
- Hardware: Brass, Nickel plated
- Plating: Gold flash over Nickel underplate overall

- Electrical:
 - Operating voltage: 250 VAC max
 - Current rating: 3 Amps max
 - Contact resistance: 20 mohms max
 - Insulation resistance: 1,000 Mohms min
 - Dielectric withstanding voltage: 1,000 VAC for 1 minute
 - Temperature Rating: Operating temperature: -65°C to +125°C
- Environmental:
 - Lead free, RoHS compliant
 - Recommended soldering temp: 235°C for 5 seconds



ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: D-SUB SOCKET, .318" FOOTPRINT, FORKED BOARD LOCKS, #4-40 FLUSH THREADED INSERTS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	
SIZE	PART NO.
X	DE09-SL-24
REF: S0087T	SCALE: NTS
	SHEET 1 OF 1