
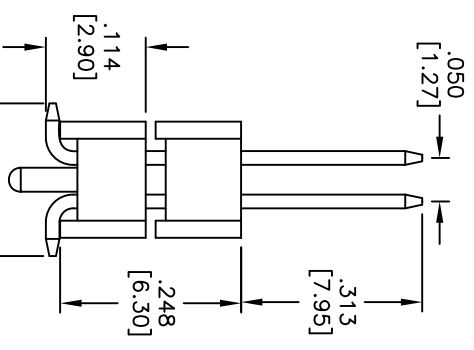
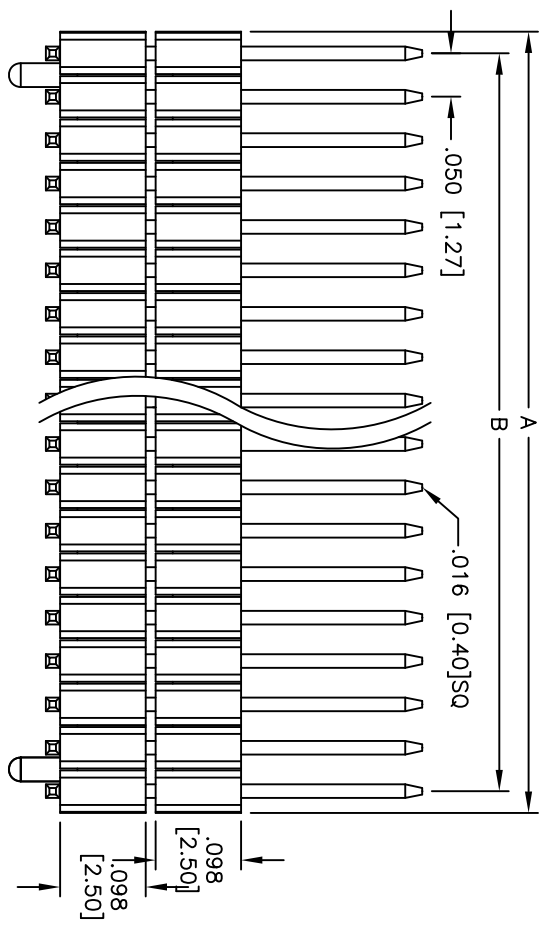
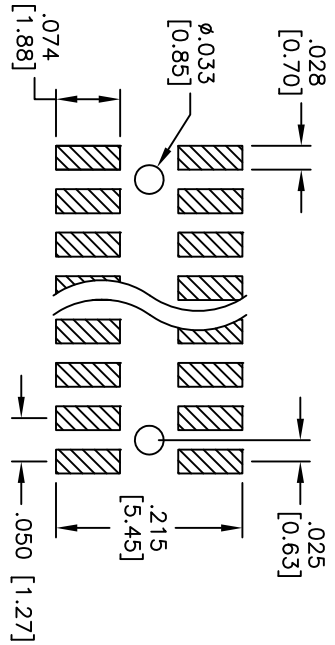


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/27/10	

APPROVED: _____
 DATE: _____ TITLE: _____

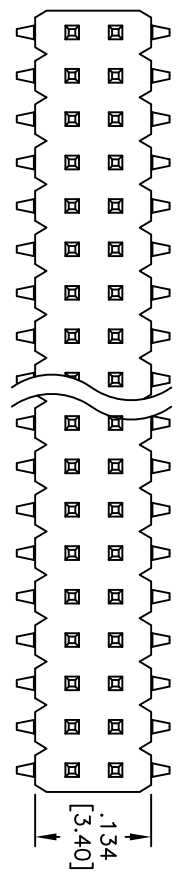

Positions: 5 thru 33
 A = .050 [1.27] x No. of Positions
 B = .050 [1.27] x No. of Spaces

SPECIFICATIONS:

Material: Nylon 6T, glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Plating: Gold flash over Nickel underplate on contact area, Tin over Copper underplate on tails.

Electrical:
 Current rating: 1 Amps max
 Contact resistance: 20 mohms max
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 300 VAC for 1 minute
 Temperature Rating: Operating temperature: -40°C to +105°C

Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 seconds



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .050 [1.27] DUAL ROW PIN HEADER
 DUAL INSULATOR, SURFACE MOUNT

SIZE	PART NO.	REV.
X	DHPH-2A-XX-SG-.313/SMT/248-P	-
REF:	S00032T	SCALE: NTS
		SHEET 1 OF 1