
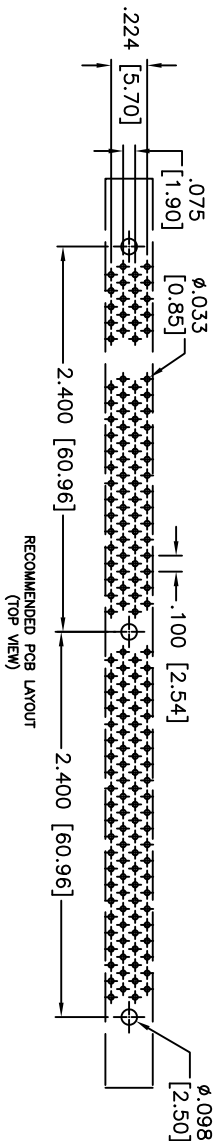
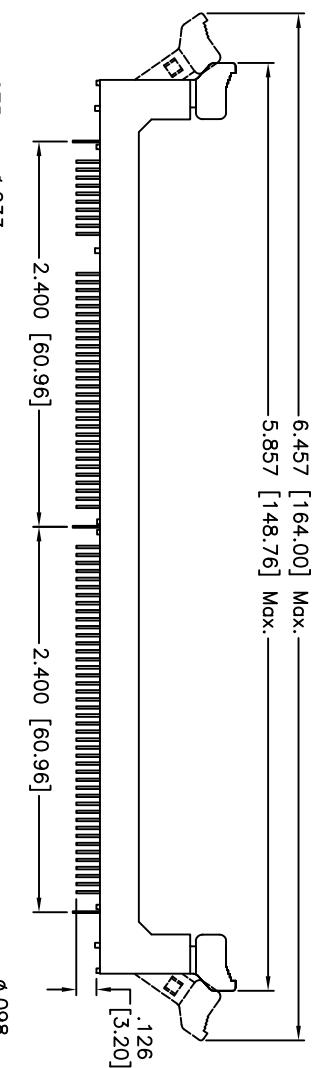


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/24/06	
A	9533	REDRAWN	5/12/09	
B		REDRAWN	9/23/10	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

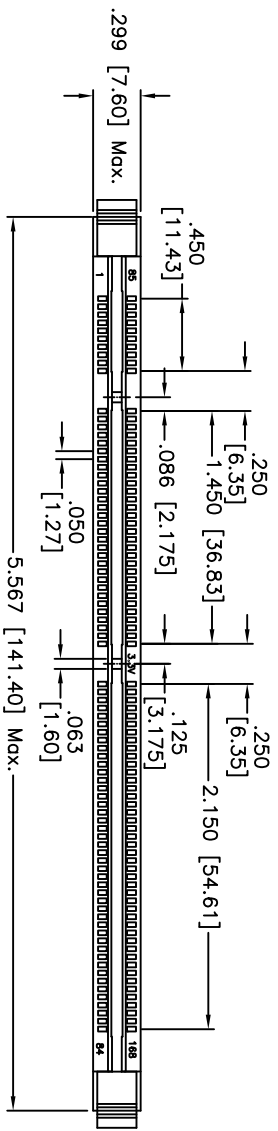

**SPECIFICATIONS:**

**Material:**  
 Insulator: HI-Temperature thermoplastic, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Copper Alloy  
 Plating:  
 Gold Flash over Nickel underplate on contact area,  
 Tin over Copper underplate on solder tails  
**Electrical:**  
 Operating voltage: 250 VAC max  
 Current rating: 1 Amp max  
 Contact resistance: 30 mohms max  
 Insulation resistance: 1000 Mohms min  
 Dielectric Withstanding Voltage: AC 500V for 1 minute.  
 Temperature Rating:  
 Operating temperature: -25°C to +105°C  
**Environmental:**  
 Lead free, RoHS compliant.  
 Recommended soldering temp: 260°C for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES (MM)	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	
DRAWN	DATE
SS	5/24/06
CHECKED	
APPROVED	

**ADAM TECH**  
 909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: DIMM CONNECTOR, 168 POSITION  
 VERTICAL, 3.3V

SIZE	PART NO.	REV.
X	DIMM-168-V-1	B
REF:	S00127T	SCALE: NTS
		SHEET 1 OF 1