
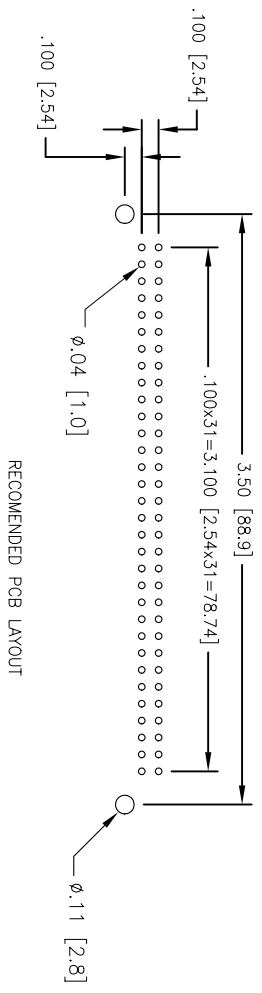
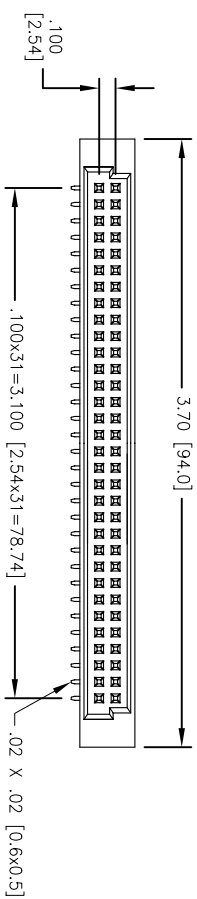


Rev	AWO #	Description	Date	Appr
-		RELEASED	03/28/05	

APPROVED: _____
 DATE: _____ TITLE: _____

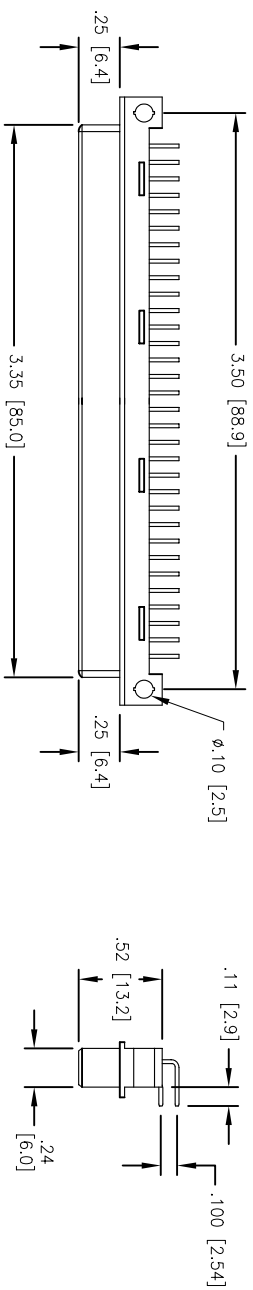

RECOMMENDED PCB LAYOUT

"X"	PLATING
1	30 u" Gold
2	15 u" Gold
3	Gold Flash

SPECIFICATIONS:

Material: Insulator: PBT, glass reinforced, rated UL 94V-0
 Insulator color: Beige
 Contacts: Phosphor Bronze
 Plating: X Gold over Nickel on contact area, Tin over Copper underplate on leads. See chart

Electrical: Operating voltage: 500 VAC max

Current rating: 2 Amps max

Contact resistance: 30 mohms max

Insulation resistance: 1000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1000 VAC for 1 minute

Temperature Rating:

Operating temperature: -55°C to +125°C

Environmental: Lead free, RoHS compliant.

Recommended soldering temp: 230° for 5 sec.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: DIN 41612, 64P FEMALE RIGHT ANGLE
 2 ROW, PCB MOUNT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XXX ± .015
.XXX ± .015	Ø.XXX ± .010
APPROVALS	DATE
DRAWN SS	03/28/05
CHECKED	
APPROVED	

SIZE X	PART NO. DIN-64FR-122-A1CX	REV. -
REF:	SCALE: NTS	SHEET 1 OF 1