

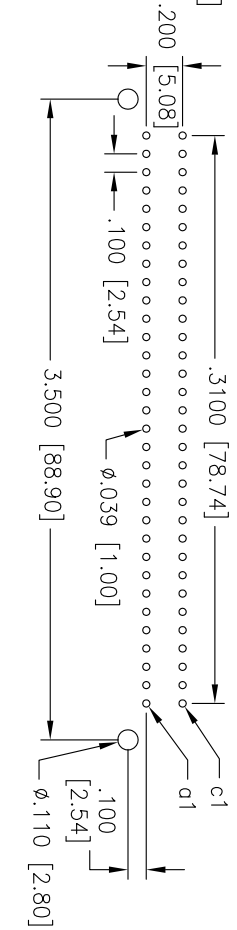
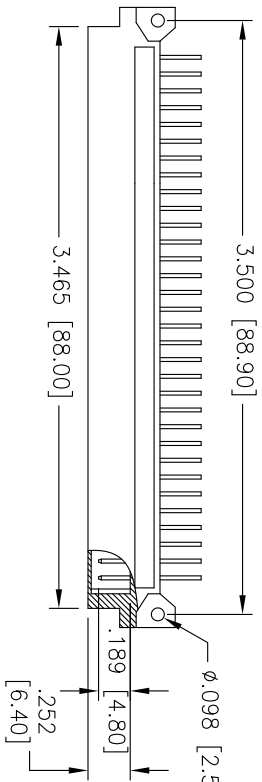


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/06/08	

APPROVED: _____
 DATE: _____ TITLE: _____

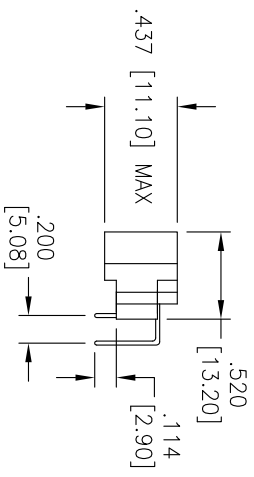

Recommended PCB Layout

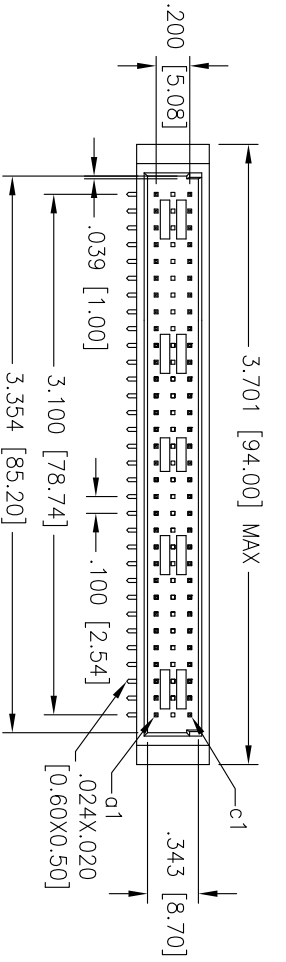

"X"	PLATING	CLASS
1	30 u" Gold	1
2	15 u" Gold	2
3	Gold Flash	3

Material: Nylon 6T, rated UL 94V-0
 Insulator: Nylon 6T, rated UL 94V-0
 Contacts: Brass
 Plating:
 X Gold over Nickel underplate on contact area,
 Tin over Copper underplate on solder tails.
 (See chart for thickness)

Electrical:
 Operating voltage: 500 VAC max
 Current rating: 2 Amps max
 Contact resistance: 30 mohms max
 Insulation resistance: 1000 Mohms min@ DC 500V
 Dielectric withstanding voltage: 1000 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -55°C to +105°C

Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 sec.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: DIN TYPE C MALE, 64 PINS LOADED
 3 ROW RIGHT ANGLE, ROWS A & C LOADED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED		DRAWN		DATE	
X	± .10	ØXX	± .10		
.XX	± .020	ØXX	± .015		
.XXX	± .015	ØXXX	± .010		
APPROVALS		APPROVALS		DATE	
CHECKED	DY			10/6/08	
APPROVED					
SIZE	PART NO.	SCALE:	NTS	SHEET	1 OF 1
X	DIN-64MR-132-A1CX-HT				
REV.					