
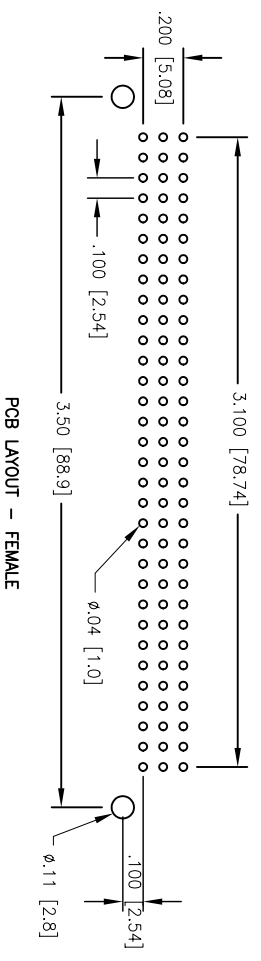
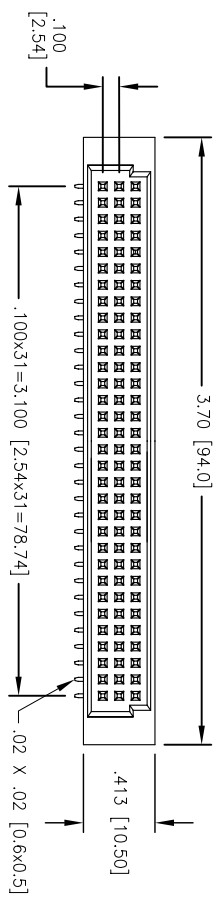


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/28/04	

APPROVED: _____
 DATE: _____ TITLE: _____

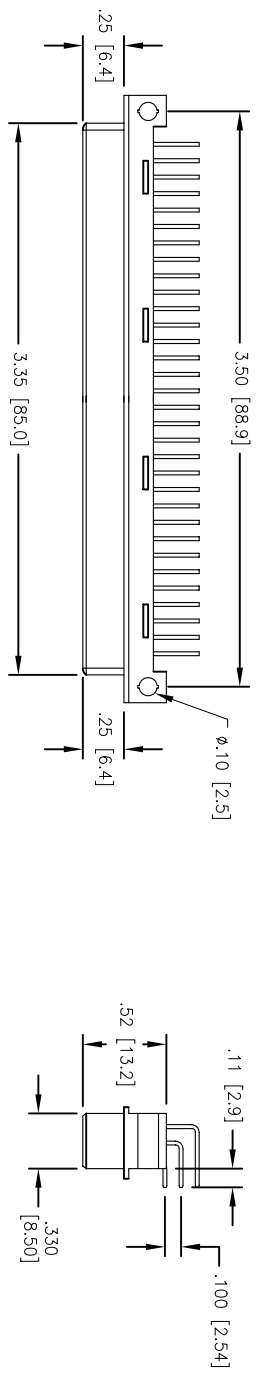

SPECIFICATIONS:

- Material: PBT, glass reinforced, rated UL 94V-0
- Insulator color: Beige
- Contacts: Phosphor Bronze
- Plating: Gold Flash over Nickel underplate on contact area, Tin over Copper underplate on PCB tails
- Electrical:
 - Operating voltage: 5000 VAC max
 - Current rating: 2 Amps max
 - Contact resistance: 30 mohms max, initial
 - Insulation resistance: 100 Mohms min @ 500 VDC
 - Dielectric withstanding voltage: 1000 VAC for 1 minute
 - Temperature Rating: -55°C to +125°C

6 5 4 3 2 1

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN SS	9/28/04
CHECKED	
APPROVED	

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: **DIN 96P FEMALE TYPE R, RIGHT ANGLE PCB, CLASS 3 PLATING**

SIZE: X PART NO.: DIN-96FR-L33-A1C3

REF: SCALE: NTS SHEET 1 OF 1

6 5 4 3 2 1