
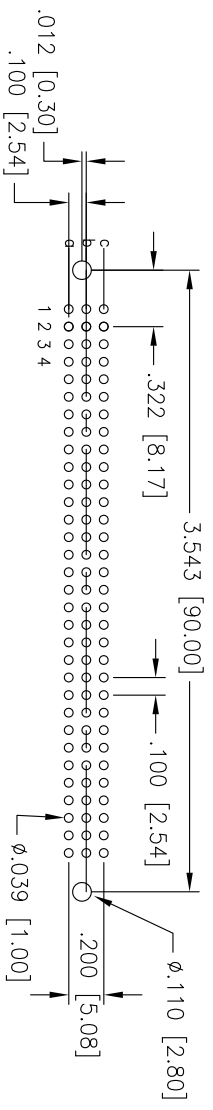
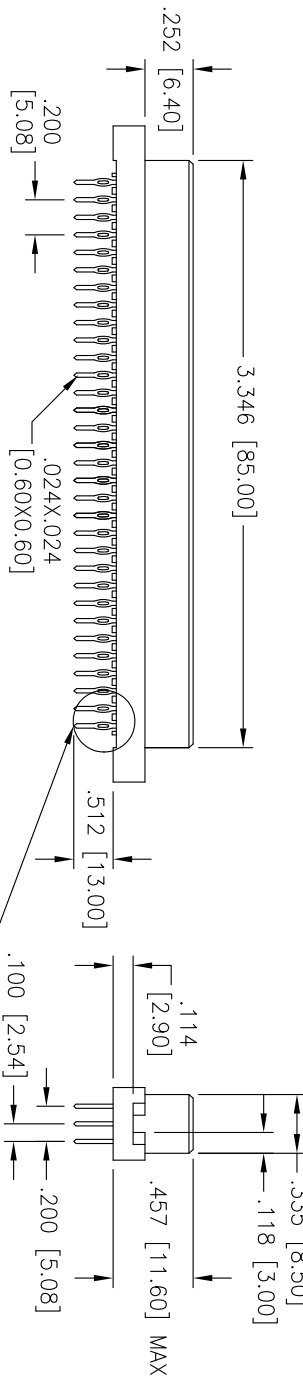


Rev	AWO #	Description	Date	Appr
-	10367	RELEASED	6/23/10	

APPROVED: _____ TITLE: _____
 DATE: _____

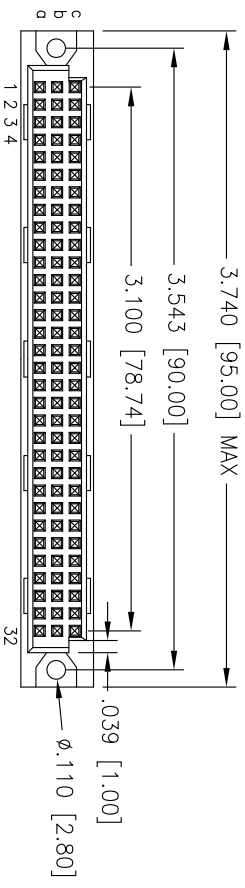

Recommended PCB Layout

"X"	PLATING	CLASS
1	30 u" Gold	1
2	15 u" Gold	2
3	Gold Flash	3

Press-Fit Type

SPECIFICATIONS:

Material:
 Insulator: PBT, rated UL 94V-0
 Contacts: Brass
Plating:
 X Gold over Nickel underplate on contact area,
 Tin over Copper underplate on solder tails.
 (See chart for thickness)

Electrical:
 Operating voltage: 500 VAC max
 Current rating: 2 Amps max
 Contact resistance: 30 mohms max
 Insulation resistance: 1000 Mohms min@ DC 500V
 Dielectric withstanding voltage: 1000 VAC for 1 minute
Temperature Rating:
 Operating temperature: -55°C to +105°C
Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.



ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: DIN TYPE C FEMALE, 96 PINS LOADED
 3 ROW STRAIGHT, ROW A & B & C LOADED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED		DRAWN: DY		DATE: 6/23/10	
INCHES: .X ± .10 ØXX ± .10 .XX ± .020 ØXXX ± .015 .XXX ± .015 ØXXXX ± .010		CHECKED:		SIZE: X	
APPROVALS:		APPROVED:		PART NO.: DIN-96FS-L33-A1CX-PF-.512	
APPROVED:		APPROVED:		REF: S00068T	
APPROVED:		APPROVED:		SCALE: NTS	
APPROVED:		APPROVED:		SHEET 1 OF 1	