
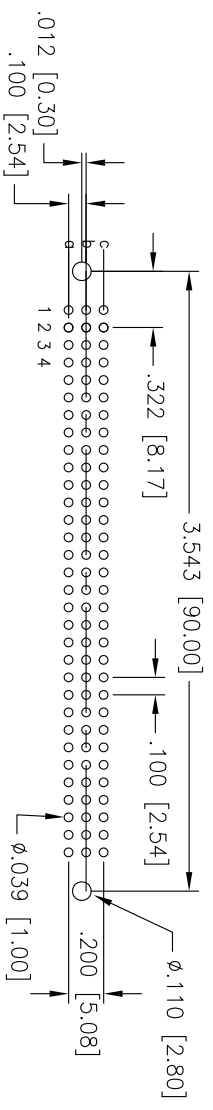
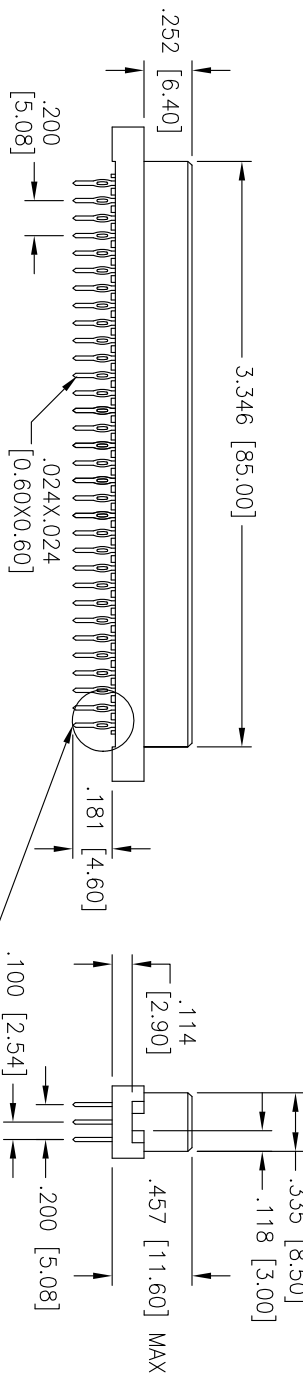



Rev	AWO #	Description	Date	Appr
-	10367	RELEASED	6/25/10	

APPROVED: \_\_\_\_\_ TITLE: \_\_\_\_\_  
 DATE: \_\_\_\_\_

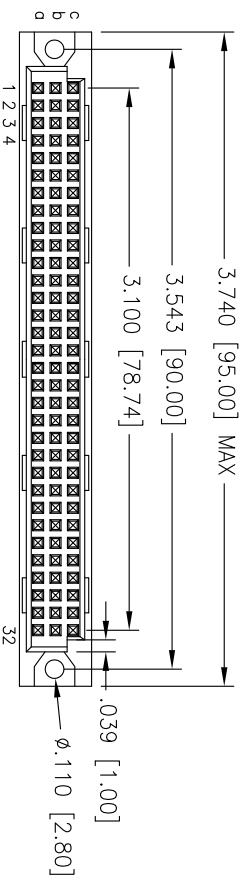

Recommended PCB Layout

"X"	PLATING	CLASS
1	30 u" Gold	1
2	15 u" Gold	2
3	Gold Flash	3



**SPECIFICATIONS:**  
 Material: Insulator: PBT, rated UL 94V-0  
 Contacts: Brass  
**Plating:**  
 X Gold over Nickel underplate on contact area,  
 Tin over Copper underplate on solder tails.  
 (See chart for thickness)

**Electrical:**  
 Operating voltage: 500 VAC max  
 Current rating: 2 Amps max  
 Contact resistance: 30 mohms max  
 Insulation resistance: 1000 Mohms min@ DC 500V  
 Dielectric withstanding voltage: 1000 VAC for 1 minute  
**Temperature Rating:**  
 Operating temperature: -55°C to +105°C  
 Environmental:  
 Lead free, RoHS compliant.  
 Recommended soldering temp: 235°C for 5 sec.



**ADAM TECH**

909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: DIN TYPE C FEMALE; 96 PINS LOADED  
 3 ROW STRAIGHT, ROW A & B & C LOADED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED		DRAWN		DY		6/25/10	
INCHES: .10 ± .020 .020 ± .015 .015 ± .010 HOLES: ØXX ± .015 ØXXX ± .010		CHECKED		DATE			
APPROVED		APPROVALS		DATE			
SIZE X		PART NO. DIN-96FS-133-A1CX-PF		TITLE		REV. -	
REF: S00068T		SCALE: NTS		SHEET 1 OF 1			