
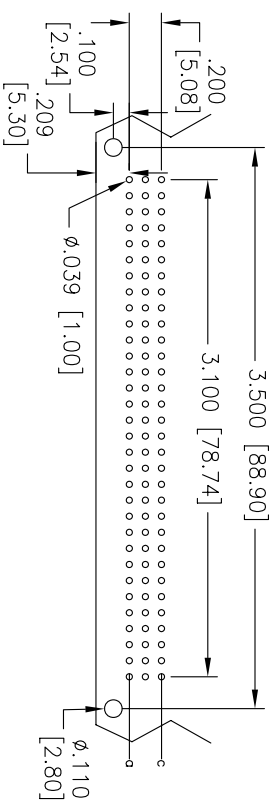
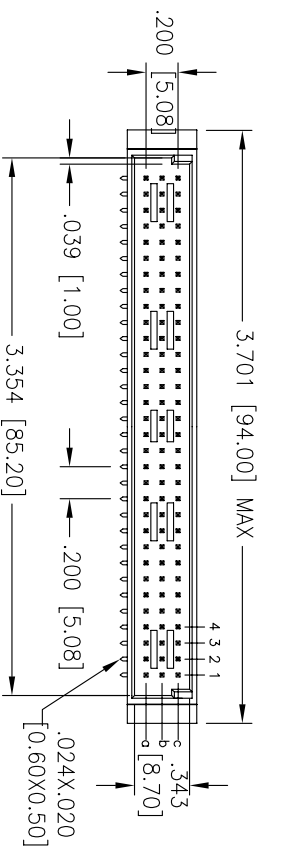
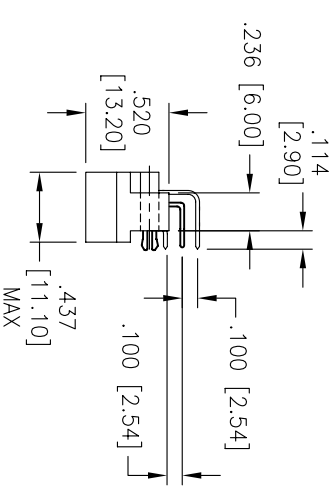


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/22/08	

APPROVED: _____
 DATE: _____ TITLE: _____

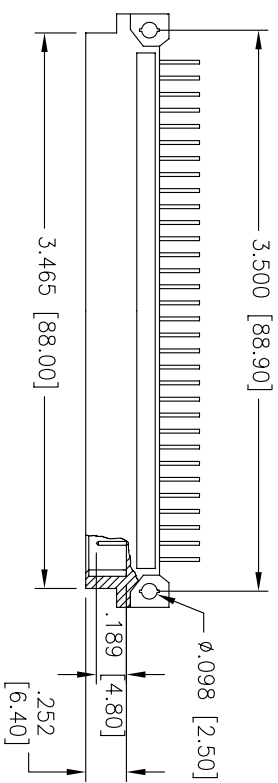

Recommended PCB Layout

"X"	PLATING	CLASS
1	30 u" Gold	1
2	15 u" Gold	2
3	Gold Flash	3

SPECIFICATIONS:

Material:
 Insulator: PBT, glass reinforced, rated UL 94V-0
 Contacts: Brass
Plating:
 X Gold over Nickel underplate on contact area,
 Tin over Copper underplate on solder tails.
 (See chart for thickness)

Electrical:
 Operating voltage: 500 VAC max
 Current rating: 2 Amps max

Contact resistance: 30 mohms max
 Insulation resistance: 1000 Mohms min@ DC 500V

Dielectric withstanding voltage: 1000 VAC for 1 minute
Temperature Rating:
 Operating temperature: -55°C to +105°C

Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.



6 5 4 3 2 1

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: DIN TYPE C MALE, 96 PINS LOADED,
 3 ROW RIGHT ANGLE, ROWS A & B & C LOADED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
.X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010
APPROVALS		DATE	
DRAWN	DY	10/22/08	
CHECKED			
APPROVED			
SIZE	PART NO.	REV.	
X	DIN-96MR-L33-A1CX-BL		
REF.	SCALE: NTS	SHEET	1 OF 1