


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/21/04	

APPROVED: _____
 DATE: _____ TITLE: _____

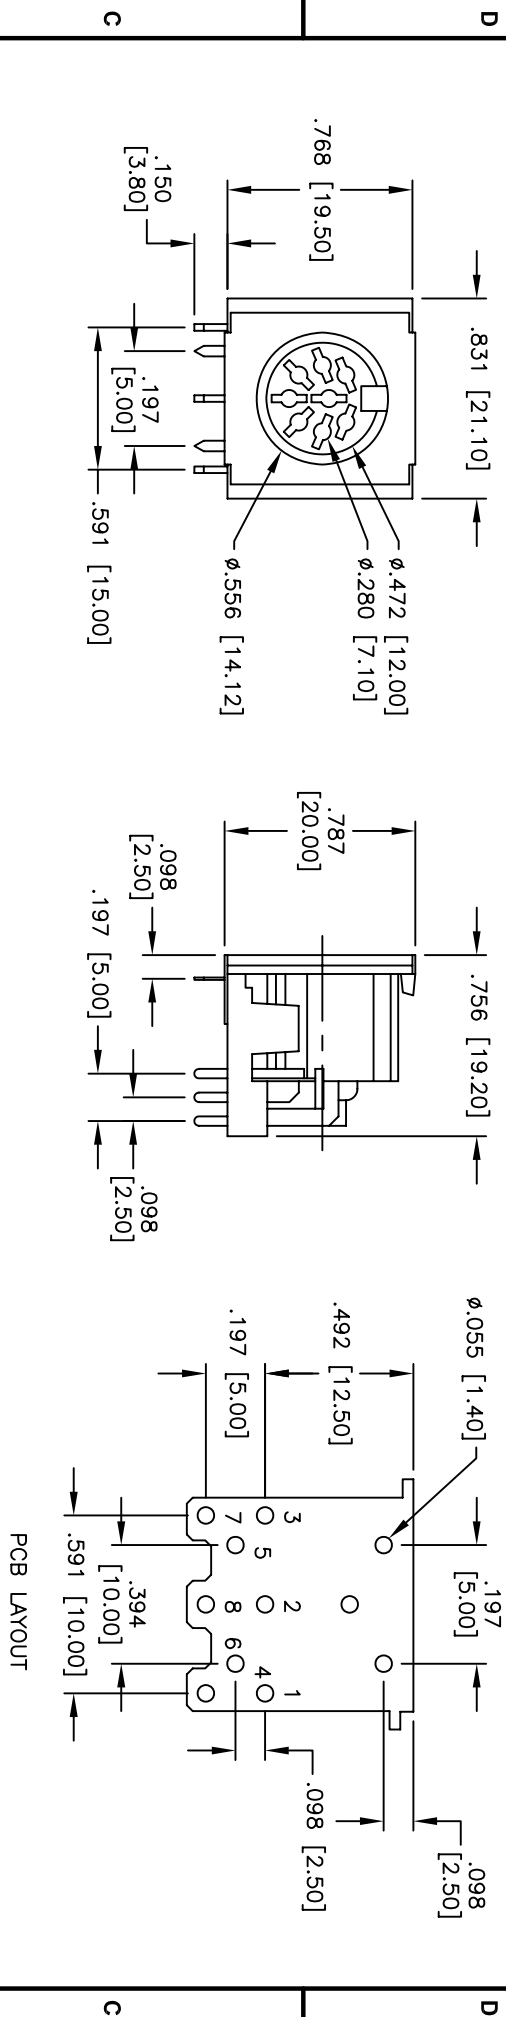

MATING FACE CONFIGURATIONS

Part Number	Configuration 1	Configuration 2	Configuration 3	Configuration 4
DJ-003-S5				
DJ-004-S5				
DJ-006-S5				
DJ-007-S5				
DJ-008-S5				

SPECIFICATIONS:
 Material: Insulator: PBT, Glass filled, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Shield: Coper Alloy, Bright Nickel plated
 Plating: Tin over Copper underplate overall
 Electrical:
 Operating voltage: 20 VDC max.
 Current rating: 2 Amps max.
 Contact resistance: 20 mohms max. initial
 Insulation resistance: 500 Mohms min.
 Dielectric withstanding voltage: 1,000 VAC for 1 minute
 Temperature Rating: Operating temperature: -25°C to +100°C
 Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 235 for 5 sec.

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

**DIN JACK, SHIELDED,
 .197 [5.00] CENTERLINE FRONT PINS**

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]	TOLERANCES: EXCEPT AS NOTED	HOLDS	DATE
.X ± .10	ØXX ± .10	ØXX ± .10	
.XX ± .020	ØXXX ± .015	ØXXX ± .015	
.XXX ± .015	ØXXXX ± .010	ØXXXX ± .010	
APPROVALS	DATE		
DRAWN	SS	10/4/04	
CHECKED			
APPROVED			
SIZE	PART NO.	REV.	
X	DJ-00X-S5	-	
SCALE: NTS	SHEET 1 OF 1		