
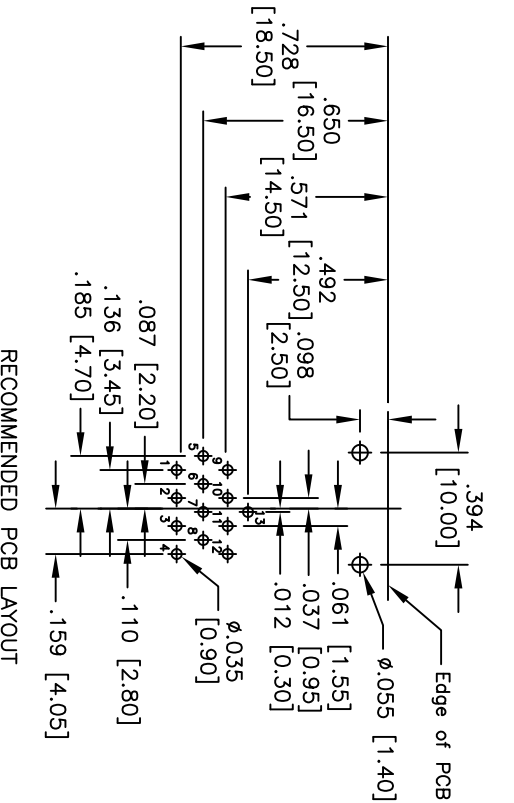


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/02/10	

APPROVED: _____
 DATE: _____ TITLE: _____

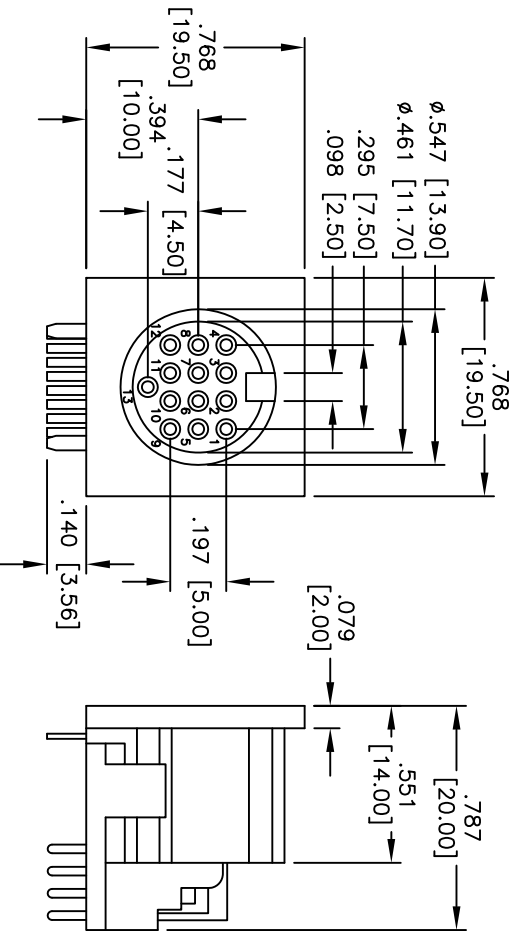

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

- Material: Insulator: PBT, Glass filled, rated UL 94V-0
- Insulator color: Black
- Contacts Terminal: Phosphor Bronze, silver plated.
- Earth Terminal: Phosphor Bronze, Tin plated
- Electrical:
 - Current rating: AC:100V 1A; DC:12V 2A
 - Contact resistance: 100 mohms max; initial
 - Insulation resistance: 100 Mohms min.
 - Dielectric withstanding voltage: 500 VAC for 1 minute
- Environmental:
 - Lead free, RoHS compliant.
 - Recommended soldering temp: 235°C for 5 sec.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]	
TOLERANCES EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: 13 PIN DIN SOCKET CONNECTOR
 .394 [10.00] CENTERLINE FRONT PINS

SIZE: X PART NO.: DJ-013
 REF: S00074T SCALE: NTS SHEET 1 OF 1