


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/29/04	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

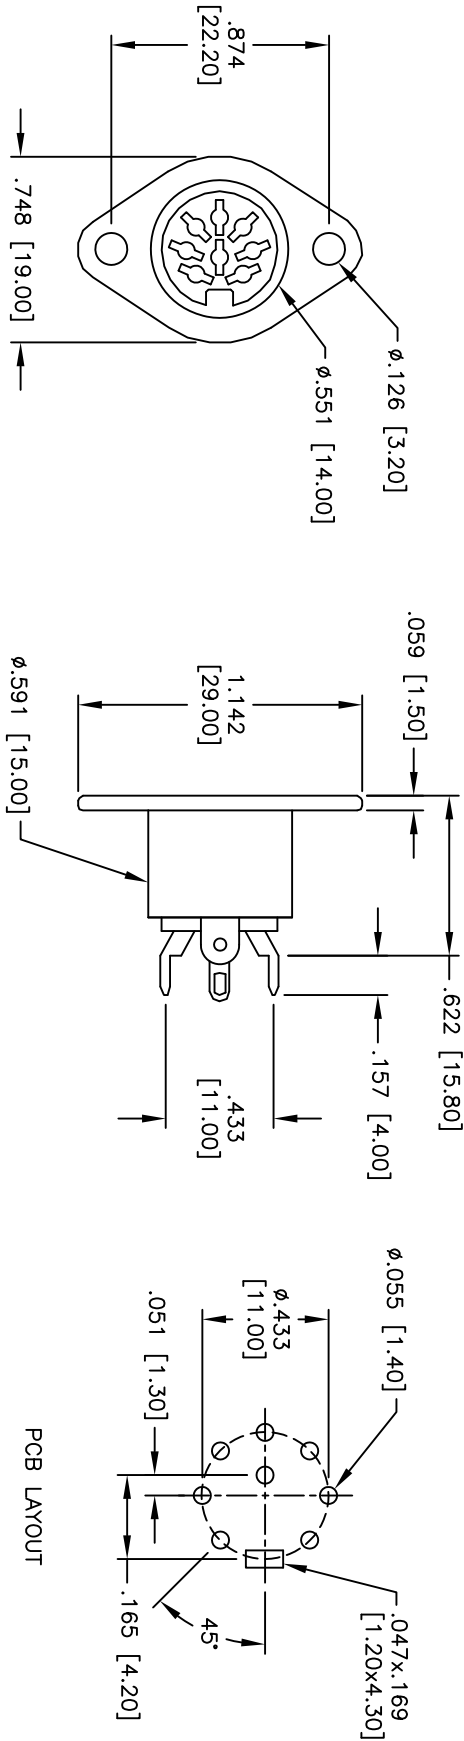

MATING FACE CONFIGURATIONS							
DJP-003-B	DJP-004-B	DJP-005-B	DJP-006-B	DJP-007-B	DJP-008-B		

**SPECIFICATIONS:**

Material: Insulator: PBT, Glass filled, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Brass  
 Shield: Copper Alloy, Bright Nickel plated  
 Plating: Tin over Copper underplate overall  
 Electrical:  
 Operating voltage: 20 VDC max.  
 Current rating: 2 Amps max.  
 Contact resistance: 20 mohms max. initial  
 Insulation resistance: 500 Mohms min.  
 Dielectric withstanding voltage: 1,000 VAC for 1 minute  
 Temperature Rating:  
 Operating temperature: -25°C to +100°C

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES Holes  
 .X ± .10  
 .XX ± .020  
 .XXX ± .015  
 .XXX ± .010

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

DRAWN	SS	12/29/04	SIZE	PART NO.	REV.
CHECKED			X	DJP-00X-B	-
APPROVED			REF:	SCALE: NTS	SHEET 1 OF 1

6 5 4 3 2 1