

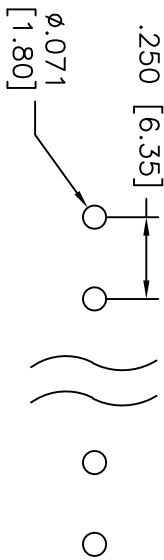


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/26/10	

APPROVED: _____
 DATE: _____ TITLE: _____

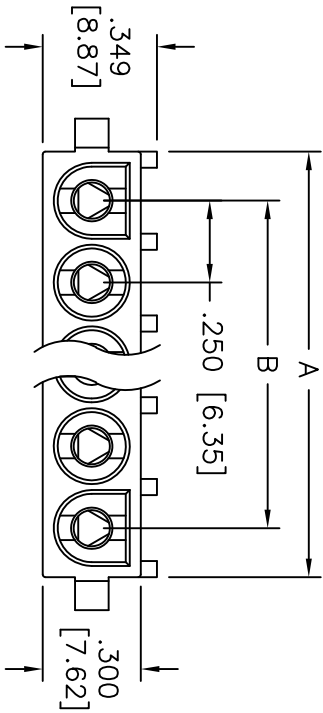

Recommended PCB Layout

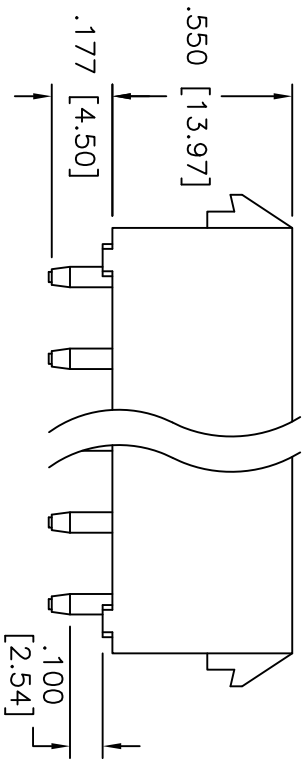

SPECIFICATIONS:

Material: Nylon 66, rated UL 94V-0
 Insulator color: Natural
 Contacts: Phosphor Bronze
 Plating: Gold flash over Nickel underplate overall

Electrical:
 Current rating: 11 Amps max.
 Insulation resistance: 1000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 5000 VAC for 1 minute
 Mechanical:
 Temperature Rating:
 Operating temperature: 0°C to +85°C

Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.



Positions: 02 thru 10
 A = .250 [6.35] X No. of Positions + .050 [1.27]
 B = .250 [6.35] X No. of Spaces

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: WIRE TO BOARD, FEMALE, 6.35mm PITCH
 SINGLE ROW TYPE, GOLD PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED		INCHES		HOLE SIZE		DATE	
.X	± .10	ØX	± .10	ØXXX	± .015	APPROVALS	
.XX	± .020	ØXXX	± .015	DATE		DRAWN	
.XXX	± .015			DATE		CHECKED	
APPROVED		AW		10/26/10		SIZE	
						PART NO.	
						DME-XX-S-S-G-V0	
REF: S00123T		SCALE: NTS		SHEET 1 OF 1		REV.	