

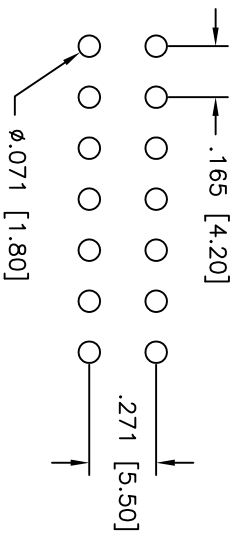
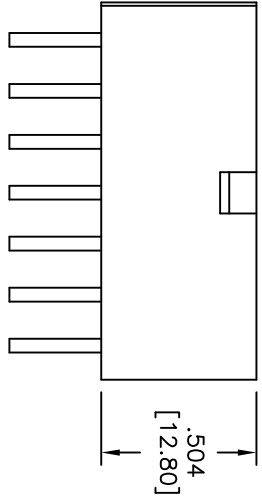


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/19/04	
A		REVISED PCB LAYOUT	12/18/08	

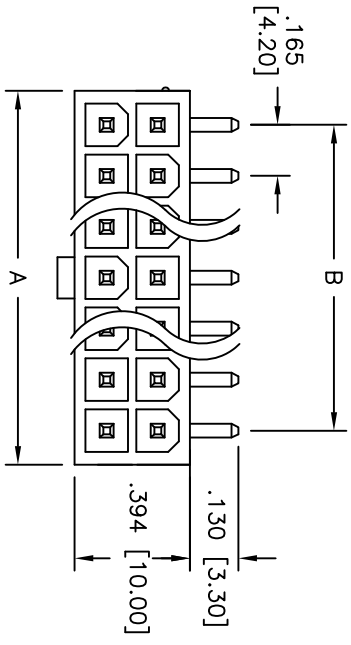

RECOMMENDED PCB LAYOUT

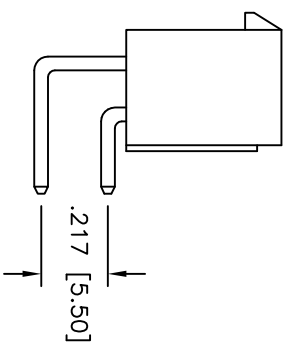

CURRENT	CIRCUITS			
	2	4-6	8-10	12-24
9 A	8 A	7 A	6 A	6 A
7 A	6 A	5 A	5 A	5 A
5 A	4 A	4 A	4 A	4 A
4 A	3 A	3 A	3 A	3 A

A = .165 [4.20] x No. of Spaces + .213 [5.40]
 B = .165 [4.20] x No. of Spaces

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

RIGHT ANGLE HOUSING, MALE TERMINAL
 PCB MOUNT

SPECIFICATIONS:
 Material: Insulator: Nylon 66, rated UL 94V-2
 Insulator color: Natural
 Contact: Brass, Tin plated
 Electrical:
 Operating voltage: 600 VAC RMS. max
 Current rating: / Circuit (See Chart)
 Insulation resistance: 1000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1500 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -25°C to +120°C
 Environmental:
 Lead free, RoHS compliant.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED INCHES	
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	SS
CHECKED	8/19/04
APPROVED	

SIZE	PART NO.	REV.
X	DMF-XX-R-N	A
REF:	S0006T	SHEET 1 OF 2
SCALE:	NTS	