
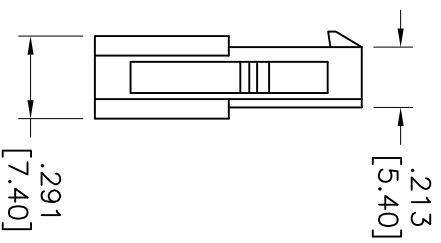
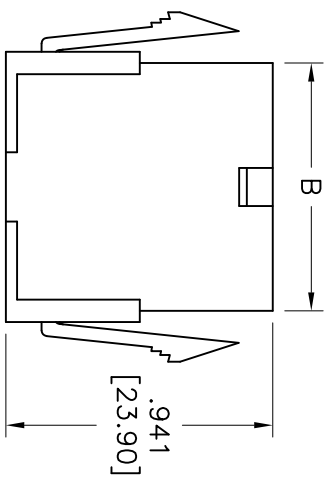


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/25/08	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

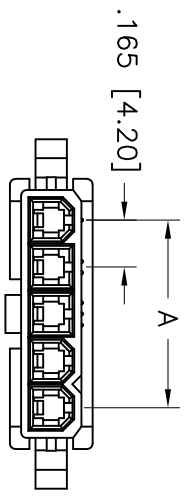

Wire Size AWG	Positions				
	2,3	4~6	7~10	11,12	
#16	9A	8A	7A	6A	
#18	9A	8A	7A	6A	
#20	7A	6A	5A	5A	
#22	5A	4A	4A	4A	
#24	4A	3A	3A	3A	
#26	3A	2A	2A	2A	
#28	2A	1A	1A	1A	

Positions: 2 thru 12  
 A = .165 [4.20] X No. of Spaces per row  
 B = .165 [4.20] X No. of Positions per row + .047 [1.20]

**SPECIFICATIONS:**  
 Material: \_\_\_\_\_  
 Insulator: Nylon 66, rated 600 VAC max  
 Insulator color: Natural  
 Electrical:  
 Operating voltage: 600 VAC max  
 Current rating: See chart  
 Insulation resistance: 1000 Mohms min @ 500 VDC  
 Dielectric withstanding voltage: 1500 VAC for 1 minute  
 Mechanical:  
 Wire size: 16 Awg thru 28 Awg  
 Temperature Rating: \_\_\_\_\_  
 Operating temperature: -40°C to 105°C  
 Environmental:  
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: PLUG HOUSING, SINGLE ROW, .165 [4.20] PITCH

SIZE: X PART NO.: DMF-XX-W-S-V0

SCALE: NTS SHEET 1 OF 1