
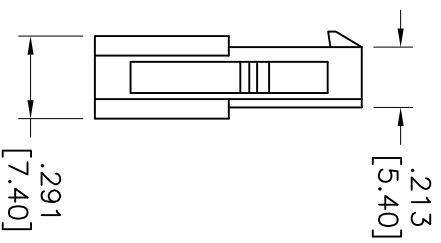
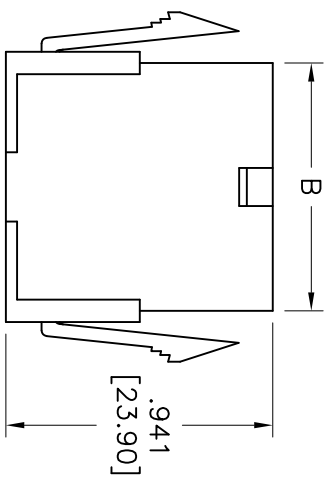


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/25/08	

APPROVED: _____
 DATE: _____ TITLE: _____

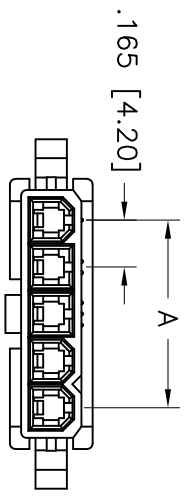

Wire Size AWG	Positions				
	2,3	4~6	7~10	11,12	
#16	9A	8A	7A	6A	6A
#18	9A	8A	7A	6A	6A
#20	7A	6A	5A	5A	5A
#22	5A	4A	4A	4A	4A
#24	4A	3A	3A	3A	3A
#26	3A	2A	2A	2A	2A
#28	2A	1A	1A	1A	1A

Positions: 2 thru 12
 A = .165 [4.20] X No. of Spaces per row
 B = .165 [4.20] X No. of Positions per row + .047 [1.20]

SPECIFICATIONS:
 Material: _____
 Insulator: Nylon 66, rated UL 94V-2
 Insulator color: Natural
 Electrical:
 Operating voltage: 600 VAC max
 Current rating: See chart
 Insulation resistance: 1000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1500 VAC for 1 minute
 Mechanical:
 Wire size: 16 Awg thru 28 Awg
 Temperature Rating:
 Operating temperature: -40°C to 105°C
 Environmental:
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE		PLUG HOUSING, SINGLE ROW, .165 [4.20] PITCH	
SIZE	PART NO.	DMF-XX-W-S	REV.
X			-
REF:	SCALE:	NTS	SHEET 1 OF 1

6 5 4 3 2 1