
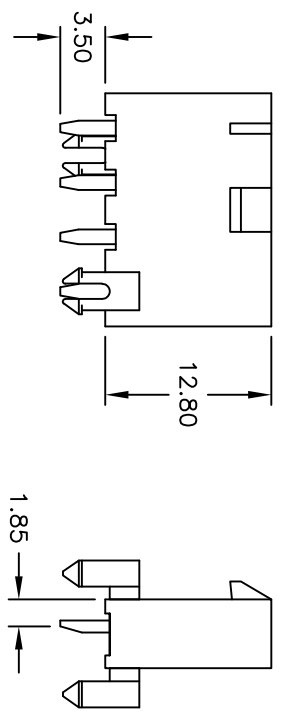


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/1/04	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

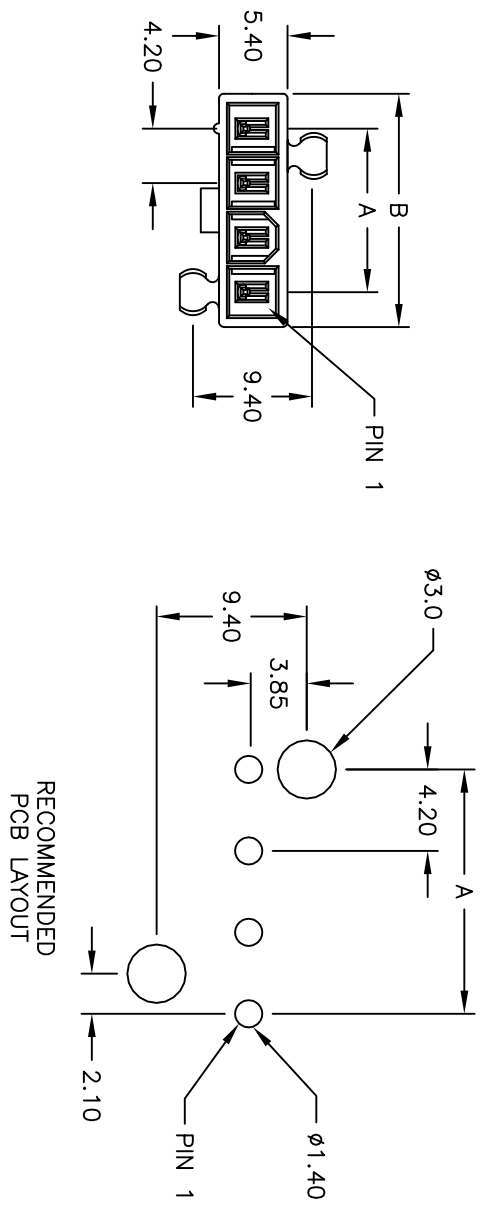

26.40	21.00	DMKA-06-T-3-V0	6
22.20	16.80	DMKA-05-T-3-V0	5
18.00	12.60	DMKA-04-T-3-V0	4
13.80	8.40	DMKA-03-T-3-V0	3
9.60	4.20	DMKA-02-T-3-V0	2
ADAM TECH P/N:			CKT. SIZE

**SPECIFICATIONS:**

Material: Nylon, rated UL 94V-0  
 Insulator color: Natural  
 Pins: Brass, Tin Plated  
 Electrical:  
 Operation voltage: 600 VAC max  
 Current rating: 8 Amps max  
 Contact resistance: 10 mohms max  
 Dielectric withstanding voltage: 1500 VAC for 1 minute  
 Environmental:  
 Operating temperature: -40°C to +105°C  
 Environmental:  
 Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE MM  
 TOLERANCES: EXCEPT AS NOTED

INCHES	MILLIMETERS
.X	±.10
.XX	±.020
.XXX	±.015
.XXX	±.015
ØXX	±.10
ØXXX	±.015
ØXXX	±.010

APPROVALS: \_\_\_\_\_ DATE: \_\_\_\_\_

DRAWN: SIS 4/1/04  
 CHECKED: \_\_\_\_\_  
 APPROVED: \_\_\_\_\_

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MINI FIT CONNECTOR, DUAL ROW  
 4.2MM HEADER

SIZE: X PART NO.: DMKA-XX-T-3-V0  
 REF: SCALE: NTS SHEET 1 OF 1