
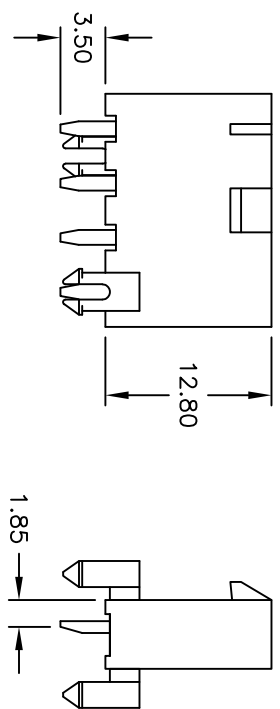


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/1/04	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

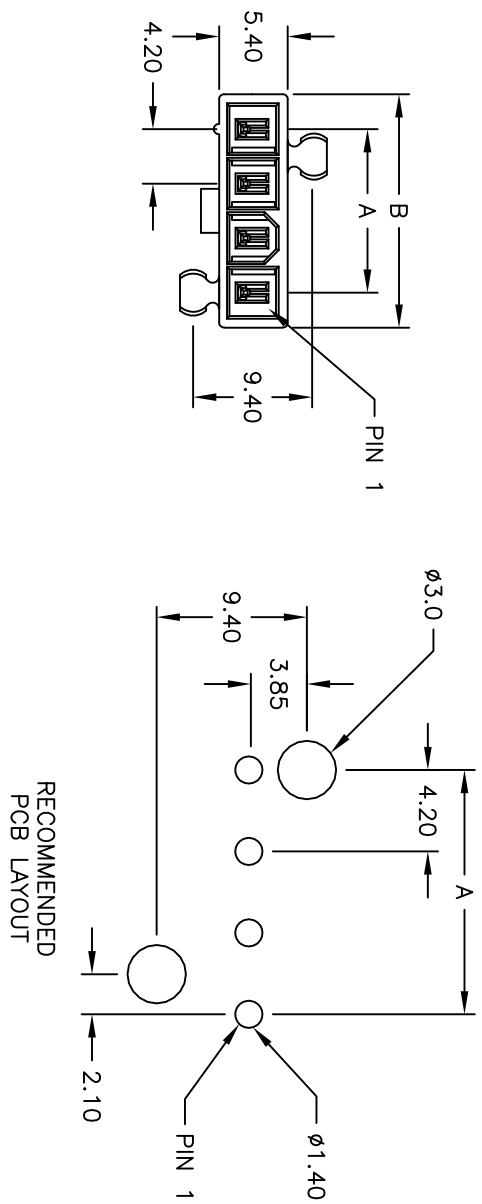

26.40	21.00	DMKA-06-T-3	6
22.20	16.80	DMKA-05-T-3	5
18.00	12.60	DMKA-04-T-3	4
13.80	8.40	DMKA-03-T-3	3
9.60	4.20	DMKA-02-T-3	2
B	A	ADAM TECH P/N:	CKT. SIZE

**SPECIFICATIONS:**

Material: Nylon, rated UL 94V-2  
 Insulator color: Natural  
 Pins: Brass, Tin Plated  
 Electrical:  
 Operation voltage: 600 VAC max  
 Current rating: 8 Amps max  
 Contact resistance: 10 mohms max  
 Dielectric withstanding voltage: 1500 VAC for 1 minute  
 Environmental:  
 Operating temperature: -40°C to +105°C  
 Environmental:  
 Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	± .10
.XX ± .020	± .015
.XXX ± .015	± .010
APPROVALS	
DRAWN	SLS
CHECKED	
APPROVED	

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710  
 TITLE: MINI FIT CONNECTOR, DUAL ROW  
 4.2MM HEADER  
 REF: \_\_\_\_\_  
 SCALE: NTS  
 SHEET 1 OF 1