



Rev	AWO #	Description	Date	Appr
-	11140	RELEASED	3/09/11	

APPROVED: _____
 DATE: _____ TITLE: _____

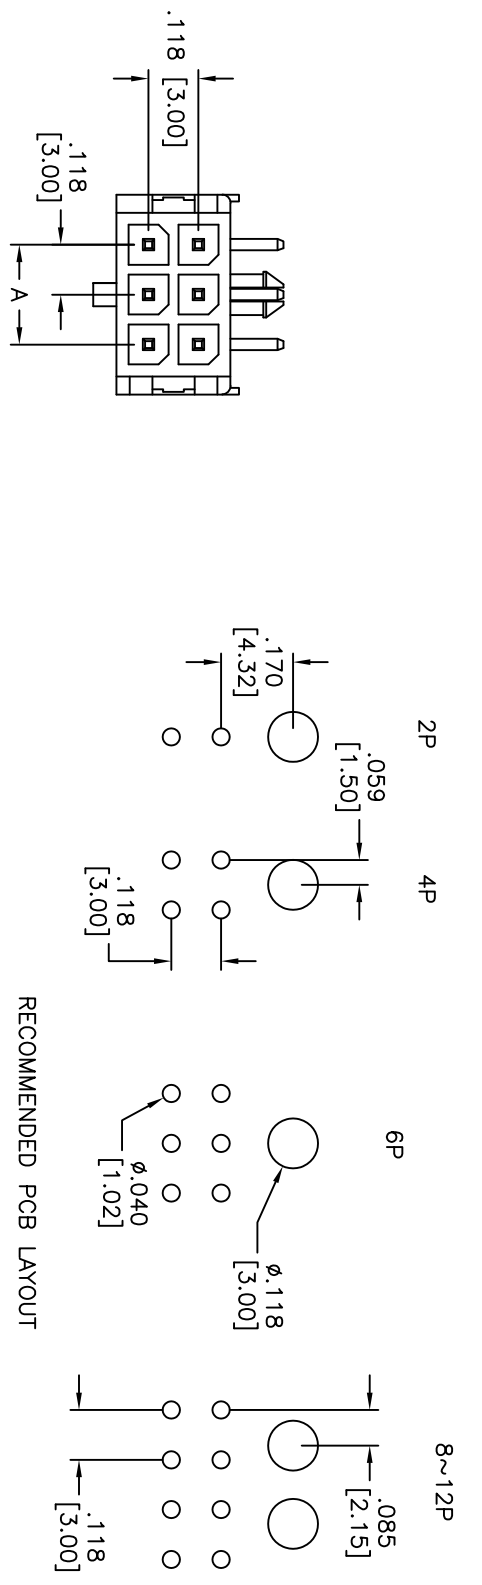

RECOMMENDED PCB LAYOUT

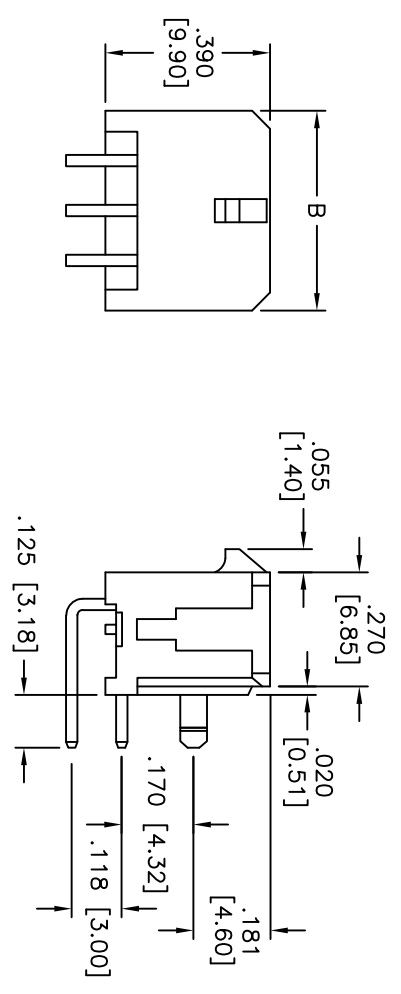

POSITIONS	Dimension	
	A	B
2	.236 [6.00]	
4	.118 [3.00]	.354 [9.00]
6	.236 [6.00]	.472 [12.00]
8	.354 [9.00]	.591 [15.00]
10	.472 [12.00]	.709 [18.00]
12	.591 [15.00]	.827 [21.00]
14	.709 [18.00]	.945 [24.00]
16	.827 [21.00]	1.063 [27.00]
18	.945 [24.00]	1.181 [30.00]
20	1.063 [27.00]	1.299 [33.00]
22	1.181 [30.00]	1.417 [36.00]
24	1.299 [33.00]	1.535 [39.00]

SPECIFICATIONS:

Material: Insulator: Thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contact: Brass, Tin plated
 Electrical:
 Operating voltage: 250 VAC
 Current rating: 5 Amps
 Contact resistance: 10 mohms max.
 Withstanding voltage: 1500 VAC for 1 minute
 Temperature rise: 30°C max.
 Environmental:
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

APPROVALS: _____ DATE: _____

DRAWN: DY 3/09/11
 CHECKED: _____
 APPROVED: _____

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .118 [3.00] DUAL ROW HEADER
 HORIZONTAL, PCB TYPE

SIZE: X PART NO.: DML-XX-A-H-T-A
 REF: S00015T SCALE: NTS SHEET 1 OF 1