
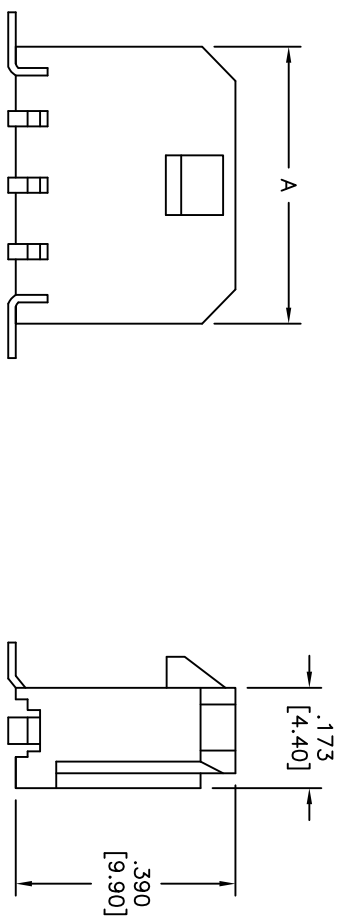


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/01/09	

APPROVED: _____

DATE: _____ TITLE: _____

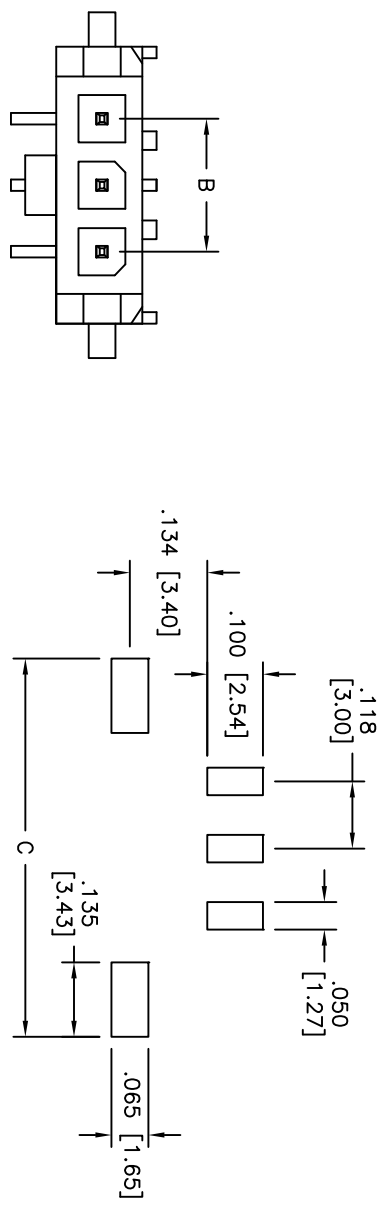

Positions: 2 thru 12
 A = .118 [3.00] x No. of Spaces
 B = .118 [3.00] x No. of Positions + .146 [3.70]
 C = .118 [3.00] x No. of Positions + .232 [8.20]

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: 0.64mm Square Pin, Brass Tin plated

Plating:
Tin over Copper underplate overall

Electrical:

Operating voltage: 250V AC, DC

Current rating: 5A AC, DC

Insulation resistance: 1000 Mohms min

Dielectric withstanding voltage: 1500 VAC for 1 minute

Temperature Rating:
Ambient temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.

Recommended soldering temp: 260°C for 5 sec.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: SINGLE ROW, .118"(3.0MM) PITCH, SMT HEADER
 TIN PLATED, W/ FITTING NAIL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]			
.X	± .10	ØXX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXXX	± .010
APPROVALS		DATE	
DRAWN	DY	12/01/09	
CHECKED			
APPROVED			

SIZE	PART NO.	REV.
X	DML1-XX-V-T-SMT	-
REF:	S00018T	SCALE: NTS
SHEET 1 OF 1		