

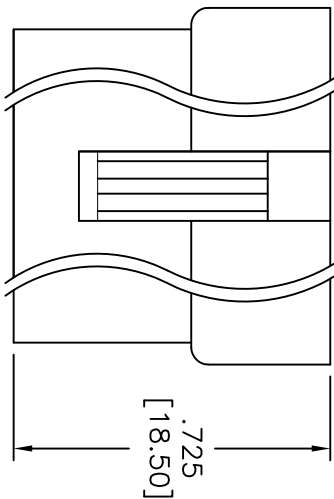


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/26/10	

APPROVED: _____
 DATE: _____ TITLE: _____

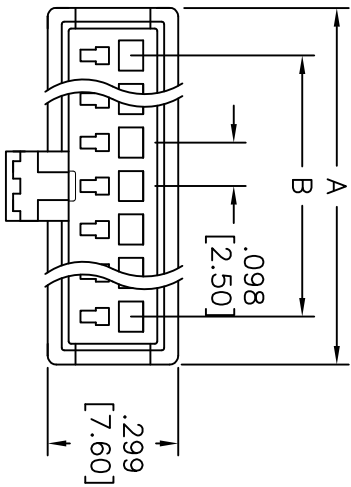

Poles: 2 thru 12
 A = .098 [2.50] X No. of Positions + .125 [3.20]
 B = .098 [2.50] X No. of Spaces

SPECIFICATIONS:

Material: Nylon66, rated UL 94V-0
 Insulator color: Black
 Electrical:
 Operating voltage: 250 VAC max
 Current rating: 3 Amps max.
 Insulation resistance: 500 Mohms min
 Dielectric withstanding voltage: 1000 VAC for 1 minute
 Mechanical:
 Temperature Rating:
 Operating temperature: -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: WIRE TO WIRE, FEMALE, .098 [2.50] PITCH

SIZE	PART NO.	REV.
X	DMQ-XX	-
REF: S0006T	SCALE: NTS	SHEET 1 OF 1