
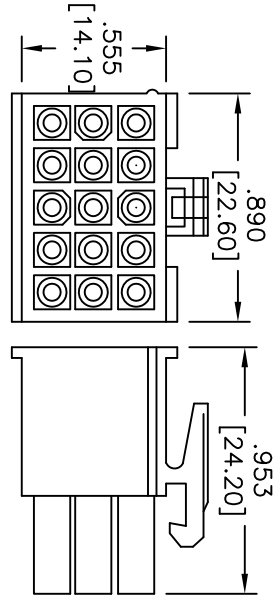
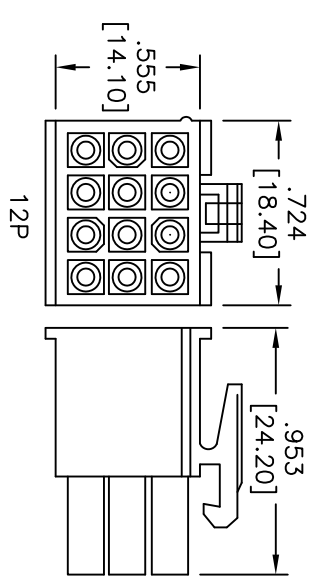
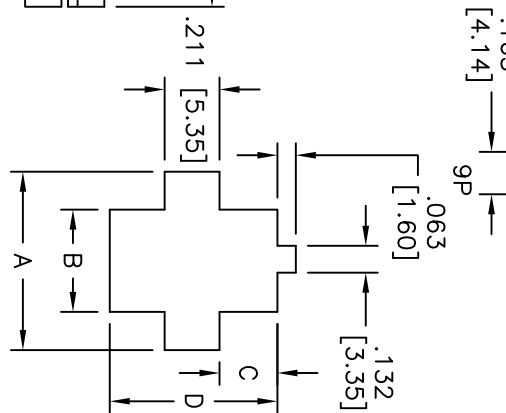
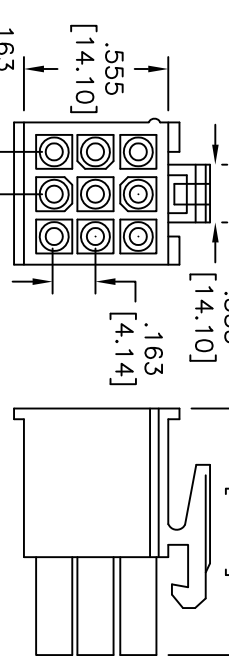
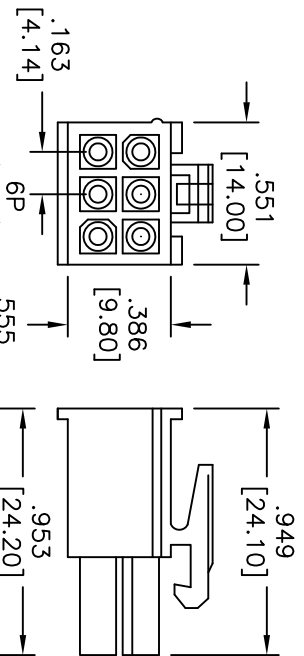
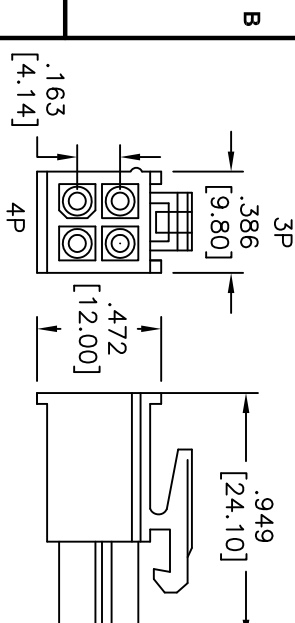
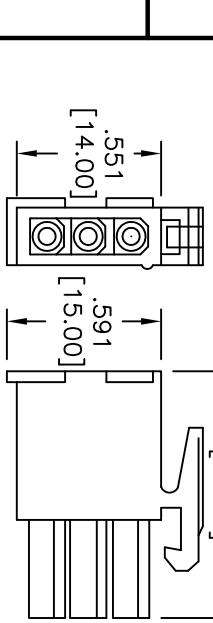
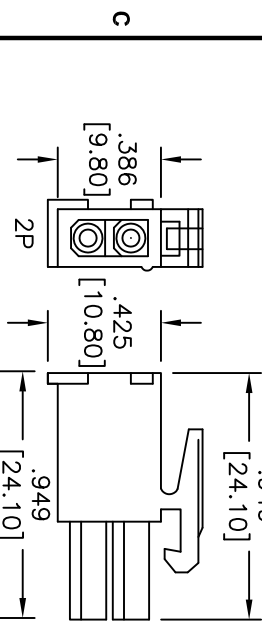


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/01/09	

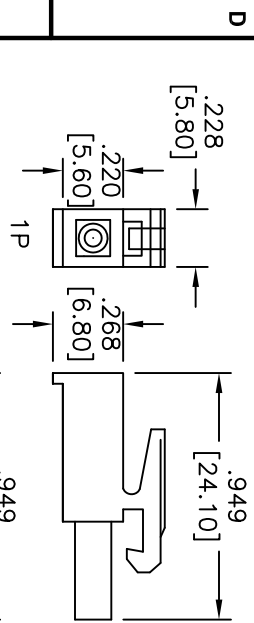

Positions	A	B	C	D
2	.421 [10.70]	.242 [6.15]	.098 [2.50]	.407 [10.35]
3	.421 [10.70]	.242 [6.15]	.181 [4.60]	.573 [14.55]
4	.587 [14.90]	.407 [10.35]	.098 [2.50]	.407 [10.35]
6	.752 [19.10]	.573 [14.55]	.098 [2.50]	.407 [10.35]
9	.752 [19.10]	.573 [14.55]	.181 [4.60]	.573 [14.55]
12	.787 [20.00]	.738 [18.75]	.181 [4.60]	.573 [14.55]
15	1.083 [27.50]	.904 [22.95]	.181 [4.60]	.573 [14.55]

SPECIFICATIONS:
 Material: Nylon66. rated UL94V-2

Electrical:

Current rating: 5A AC,DC
 Voltage rating: 300V AC,DC
 Temperature range: -25°C to +90°C
 Insulation resistance: 1,000 Mohms min.
 Withstand voltage: 1,500 V AC/ minute
Environmental:
 Lead free, RoHS compliant.

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .163" [4.14mm] WIRE TO WIRE SYSTEM

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN DY	12/01/09
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	DMM-XX	-
REF: S0001BT	SCALE: NTS	SHEET 1 OF 1

